

**23** LIGHTING  
CATALOGUE

**PROLUX**

LIGHTING IMPORTERS & DISTRIBUTORS  
TM



**prolux**<sup>TM</sup>  
lighting



Tussock House | Central Otago, New Zealand

Prolux Lighting Ltd  
40 Canaveral Drive, Rosedale, Auckland 0632  
**POSTAL:** P O Box 305027, Triton Plaza, Auckland 0757

p: +64 9 415 8110  
e: [orders@prolux.co.nz](mailto:orders@prolux.co.nz)

[www.prolux.co.nz](http://www.prolux.co.nz)

Prolux Lighting Ltd  
40 Canaveral Drive, Rosedale, Auckland 0632  
**POSTAL:** P O Box 305027, Triton Plaza, Auckland 0757

p: +64 9 415 8110  
e: orders@prolux.co.nz

[www.prolux.co.nz](http://www.prolux.co.nz)



The CCT Selectable logo is a trade mark of Prolux Lighting Ltd

**DISCLAIMER NOTICE** Every attempt has been made to ensure that the details contained within are accurate at the time of printing this catalogue. However, errors and omissions may occur. Prolux Lighting Ltd reserves the right to change and update any product information without prior notice.

*For enquiries and technical support*

*Ph 09 415 8110*

*email: [orders@prolux.co.nz](mailto:orders@prolux.co.nz)*

Prolux Lighting products are available from all  
Electrical Wholesalers & leading Lighting Retailers nationwide.



Design & Art Direction by Kennedy Gray Advertising | Brand Agency  
Printed by Printbounge | Auckland



## *Welcome.*

*I'm Callum Hawker, CEO  
and new owner of Prolux Lighting.*

It is a great honour to have been given the opportunity to take over the reigns at Prolux Lighting following the retirement of entrepreneur, innovator and founder Carl Herbst.

Needless to say it's been an exciting and challenging time for the new boy, albeit not totally unfamiliar territory given my interest in electronics in my youth and more recently in my former professional capacity as a commercial airline pilot.

So, it's been a great learning curve notwithstanding having the advantage of inheriting a great team of highly skilled electronic buffs and lighting professionals which has made for a seamless transition and my job a lot easier.

That's not to say that things haven't changed. It's a challenging business environment out there and how we have done things in the past are not necessarily right for today. That's something I'm personally focused on and passionate about... *the simple things*. In a nutshell; lifting our game, having relevance and just being better all round.

In that respect I'm proud to introduce you to our NEW-LOOK 2023 Lighting Catalogue. It's been a major project that speaks to the refresh of the Prolux brand going forward. And yes, I thought it would be a timely opportunity to put a face to the name and say hi. And by the way, the table cloth was the photographer's idea - not mine!

We're a highly experienced tight-knit team of professionals firmly imbued with a commitment to the old fashioned values of service and integrity. It's what Prolux Lighting was founded on. And we believe it's well worth preserving.

Best wishes,

*Callum Hawker*



TM



# LOOK FOR PRODUCTS CARRYING *our* CCT SELECTABLE LOGO

CCT selectable is an innovative and versatile lighting solution that allows you to adjust the colour temperature of your lighting from cool to warm with the flip of a switch.

With CCT Selectable you can now create a bright and energising atmosphere, a warm and inviting one or a cooler more subdued mood. Whatever your needs, whenever you want.

For more information on the applications and the benefits of CCT Selectable call us on 09 415 8110

## PROLUX LIGHTING



TM

ECTABLE

# INDEX

COB .....5 New Products.....9 Fire Rated .....10 Surface.....11	SMD ..... 12 Module Kit..... 13	<b>Downlights</b>	<b>04</b>
		<b>Buttons &amp; Battens</b>	<b>14</b>
<b>TRACK SPOTS (HT System)</b> - Intergrated..... 17 - GU10..... 18 - HT System..... 19		<b>Spots</b>	<b>16</b>
<b>LINEAR</b> Pendants .....23 Magnetic Track.....26		<b>Linear</b>	<b>22</b>
<b>CHANNELS</b> - Cabinet ..... 27 - Ceiling & Wall..... 28 LED .....29			
		<b>Wall lights - indoor</b>	<b>30</b>
		<b>Cabinet Recessed</b>	<b>36</b>
		<b>Stair lights</b>	<b>38</b>
<b>OUTDOOR</b> Downlights .....41 Ceiling.....42 Wall Lights .....43 Wall (GU10) .....45 Low Level.....50		<b>Outdoor</b>	<b>40</b>
<b>COMMERCIAL</b> Downlights .....57 Spots.....59 Trax System .....60 Track & Surface..... 61 Pendants.....62 Triproof.....63		<b>Commercial</b>	<b>56</b>
		<b>Lamps &amp; Drivers</b>	<b>63</b>
		<b>Warranty</b>	<b>68</b>

Inground..... 51  
 Deck Lights.....51  
 Landscape ..... 52  
 Bollards & Path ....54

*View*  
**NEW**  
**PRODUCTS**

PAGE

**4**

down  
**lights**

Page **9**



# COB DOWNLIGHTS

A more versatile and architectural type of lighting.

The use of reflectors provides different beam spreads and focussing which allows for more sophisticated lighting design.


MORE PHOTOS & INFO online at  
[www.prolux.co.nz](http://www.prolux.co.nz)

## TASMAN

IP40 Aluminium  
Colour/s: White, Black

### ADJUSTABLE

Tilt 25 degree



240V 10W 3K LED  
triac dimmable  
**Output:** 800 lumen 36 degree beam  
**Size:** 95Ø\*55H.  
**Cutout:** 85Ø (82-88Ø)  
**Classification:** IC-F

CL76



## McKENZIE

IP54 Aluminium  
Colour/s: White, Black



CL78

Tilt 30 degree  
240V 8W 3K LED  
triac dimmable  
**Output:** 700 lumen 55 degree beam  
**Size:** 80Ø\*50H.  
**Cutout:** 70Ø  
**Classification:** IC-F

## MURIWAI

IP40 Aluminium  
Colour: White



DL138


Ceiling or cabinet.  
Swivel and Tilt 20 degree  
240V 3.3W 3K LED  
non dimmable  
**Beam angle:** 45°  
**Output:** 180 lumen, Ra80  
**Size:** 50Ø\*32H.  
**Cutout:** 45Ø  
**Classification:** IC-F

## KAIKOURA

IP20 Aluminium gimble  
Colour/s: White, Black, Silver

### ADJUSTABLE

Tilt 22° swivel 355°



240V 9W 3K LED  
triac dimmable  
**Output:** 1170 lumen CRI80  
**Beam:** 36 degrees  
**Size:** 110\*110\*105H.  
**Cutout:** 97\*97  
**Classification:** IC-F




DL201

## AVALON

IP20 Aluminium gimble  
Colour/s: White, Black, Silver

### ADJUSTABLE

Tilt 22° swivel 355°



240V 18W (2x9W) 3K LED  
triac dimmable  
**Output:** 2346 lumen CRI80  
**Beam:** 36 degrees  
**Size:** 200\*110\*105H.  
**Cutout:** 185\*97  
**Classification:** IC-F

**DUNSTAN**

IP65 Waterproof on front face.  
Use indoor or outdoors  
Colour/s: White, Black



**DL103A**

240V 8W 3K LED  
triac dimmable  
**Output:** 800 lumen  
60 degree beam  
**Size:** 80Ø\*40H. Cutout: 70Ø  
**Classification:** IC-F

**REEFTON**

IP44 Aluminium  
Colour: White



**DL301**

240V 13W 3K LED  
triac dimmable  
**Output:** 850 lumen,  
60 degree beam  
**Size:** 110Ø\*55H. Cutout: 95Ø  
**Classification:** IC-F

**BULLER**

IP44 Aluminium  
Colour: White



**DL302**

240V 18W 3K or 4K LED  
triac dimmable  
**Output:** 2000 lumen,  
60 degree beam  
**Size:** 145Ø\*62H.  
**Cutout:** 120Ø  
**Classification:** IC-F

**NELSON**

IP44 Aluminium anti-glare  
Colour/s: White, Black



**DA921S**

240V 8W 3K LED  
triac dimmable  
**Output:** 600 lumen 36 degree  
**Size:** 85W\*85W\*80D.  
**Cut out:** 73Ø round  
**Classification:** IC-F


**PICTON**

IP20 Aluminium  
Colour/s: White, Black

240V 10W 3K LED  
triac dimmable  
**Output:**  
800 lumen  
**Beam angles:**  
24 degree spot  
**Size:** 96Ø\*70H.  
**Cutout:** 85Ø  
**Classification:** IC-F

**ADJUSTABLE**

Swivel 350d, tilt 45d



**DL77**



**KARAMEA**

IP20 Aluminium  
Colour: White



**LIMITED STOCKS**

**NS214**

Swivel & 45° tilt  
240V 9.5W 3K LED  
triac dimmable  
**Output:** 1170 lumen Ra80  
**Beam angle:** 30 degrees  
**Size:** 103Ø\*90H.  
**Cutout:** 95Ø


**FOXTON**

IP20 Aluminium  
Colour: White

240V 13W 3K LED  
triac dimmable  
**Output:**  
1660 lumen CR180  
**Beam:** 30 degrees  
**Size:** 91Ø\*110H.  
**Cutout:** 83Ø  
**Classification:** IC-F

**ADJUSTABLE**

Tilt 20° swivel 355°



**DL264**



**BENMORE**

IP65 Waterproof on front face  
**Colour/s:** White, Black

**DL104A**

Use indoor or outdoors  
 240V 8W 3K LED  
 triac dimmable  
**Output:** 700 lumen  
 60 degree beam  
**Size:** 80W\*80W\*40H.  
**Cutout:** 70W\*70W  
**Classification:** IC-F

**HAAST**

IP40 Aluminium  
**Colour/s:** White, Black

**DL71**

Swivel 350d, tilt 30d  
 240V 8W 3K COB LED  
 triac dimmable  
**Output:** 700 lumen 42 degree beam  
**Size:** 80\*80W\*40H.  
**Cutout:** 70Ø  
**Classification:** IC-F

**MAKARORA**

IP40 Aluminium  
**Colour/s:** White, Black

**CL104B**

Swivel 350d, tilt 30d  
 240V 10W 3K LED  
 triac dimmable  
**Output:** 700 lumen 45 degree beam  
**Size:** 90\*90W\*40H.  
**Cutout:** 75Ø  
**Classification:** IC-F


**KAIAPOI**

IP20 Aluminium  
**Colour:** White

240V 18W (2x9W) 3K LED  
 triac dimmable  
**Output:** 2270 lumen CR180  
**Beam:** 30 degrees  
**Size:** 174\*92\*113H.  
**Cutout:** 168\*86  
**Classification:** IC-F

**ADJUSTABLE**

Tilt 20° swivel 355°

**DL262****LINTON**

IP20 Aluminium  
**Colour:** White

**DL260**

Adjustable  
 240V 9W 3K LED  
 triac dimmable  
**Output:** 1135 lumen CR180  
**Beam:** 30 degrees  
**Size:** 92\*92\*113H.  
**Cutout:** 86\*86  
**Classification:** IC-F

**WAITOMO**

**DL43**

IP40 Aluminium  
Colour: White



Fixed beam anti glare  
Suited to larger areas or  
high stud

240V 13W 3K LED  
triac dimmable  
**Output:** 1430 lumen,  
CRI80, 42 degree beam  
**Size:** 92Ø\*87H.  
**Cutout:** 83Ø  
**Classification:** IC-F



**WAIOURU**

**DL24**


IP40 Aluminium  
Colour/s: White, Black

240V 13W 3K LED  
triac dimmable

**Output:**  
1000 lumen CRI80,  
55 degree beam  
**Size:** 100Ø\*80H.  
**Cutout:** 90Ø  
**Classification:** IC-F



**ADJUSTABLE**  
30° Tilt



**TAUPO**

IP40 Aluminium  
Colour/s: White, Black



**DL17**

Fixed beam anti glare  
240V 10W 3K LED  
triac dimmable  
**Output:** 800 lumen CRI80,  
36 degree  
**Size:** 80Ø\*90H.  
**Cutout:** 75Ø  
**Classification:** IC-F

**WELLINGTON**

**DL22**


IP40 Aluminium  
Colour/s: White, Black

240V 10W 3K LED  
triac dimmable

**Output:**  
810 lumen CRI80,  
45 degree beam  
**Size:** 85Ø\*80H.  
**Cutout:** 75Ø  
**Classification:** IC-F



**ADJUSTABLE**  
30° Tilt



# NEW PRODUCTS

New additions to our residential downlight range

9

## TE KOUMA

CL350

IP44 Aluminium  
Colour: White

ADJUSTABLE  
25° Tilt

**NEW**

240V 8W 3K LED  
triac dimmable  
**Output:** 700 lumen  
CRI:80 36 degree beam  
**Size:** 90mm Ø\*70H  
**Cutout:** 75mmØ  
**Classification:** IC-F



## WAIANIWA

DL361

IP44 Aluminium  
Colour: White

**NEW**

240V 13W 3K or 4K LED  
triac dimmable  
**Output:** 1250 lumen  
CRI:90 36 degree beam UGR<19  
**Size:** 150mm Ø\*95H  
**Cutout:** 120-130Ø  
**Classification:** IC-F



## LINCOLN

DL284

IP65 Aluminium  
Colour: White

**NEW**

240V 18W 3K or 4K LED  
triac dimmable  
**Output:** 1850 lumen CRI:80 60 degree beam  
**Size:** 145mm Ø\*82H Cutout: 125-140Ø  
**Classification:** IC-F



## RANFURLY

NS230

IP20 Aluminium  
Colour/s: White, Black  
Optional Gold reflector

**NEW**

240V 12W LED 3K or 4K  
triac dimmable  
**Output:** 1230 lumen  
CRI:90 36 degree beam  
**Size:** 60mmØ\*150mm long



## COROGLLEN

DL350

IP44 Aluminium  
Colour: White

**NEW**

240V 10W 3K LED  
triac dimmable  
**Output:** 900 lumen  
CRI:80 36 degree beam  
**Size:** 90mm Ø\*70H  
**Cutout:** 75mmØ  
**Classification:** IC-F




**RAGLAN**

IP40 Aluminium  
**Colour's:** White, Black

240V 9W 3K LED  
 triac dimmable  
**Output:** 1135 lumen,  
 45° beam angle  
**Size:** 83\*83\*110H.  
**Cutout:** 76\*76

Interchangeable clip in system  
 - any trim & reflector  
 combination



**DL7001**

**INSET**  
 Trim options: White, Black



**KAWHIA**


IP40 Aluminium  
**Colour/s;:** White, Black  
 Interchangeable clip in system  
 - any trim & reflector combination

**DL7002**


240V 18W (2 x 9W) 3K LED  
 triac dimmable  
**Output:** 2270 lumen,  
 45° beam angle  
**Size:** 153\*83\*110H.  
**Cutout:** 145\*76  
**Trim options:** White, Black

**CLASSIFICATION**

IC-F Abut & cover.  
 Distance to timber building  
 elements 25mm



**DL7002T**

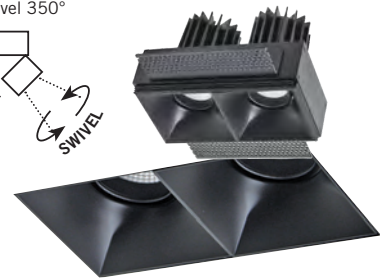

**TRIMLESS  
 OPTION**

DOWNLIGHTS - COB & Fire Rated

**FIRE  
 RATED**



Fire rated for 90 minutes to BS476 standard.  
 Waterproof - suitable showers

**PAEROA**

IP65 Aluminium  
**Colour's:** White, Black, Chrome,  
 Gold

240V 10W COB 3K LED  
 triac dimmable  
**Output:** 830 lumen,  
 60 degree beam  
**Size:** 90Ø\*71H.  
**Cutout:** 70Ø  
**Classification:** IC-F



**DFR1011**




**PUHOI**

IP20 Cast aluminium  
Colour/s: White, Black



NS207-15W



Surface mount, swivel & tilt  
240V 15W 3K or 4K LED triac dimmable  
Output: 1550 lumen  
Beam angle: 36 degrees  
Head size: 85Ø\*186L

# SURFACE DOWNLIGHTS

An ideal alternative to recessed.

NO holes to cut and easy to fit. A great option when you don't have enough space to install a recessed downlight.

MORE PHOTOS & INFO online at  
[www.prolux.co.nz](http://www.prolux.co.nz)

**TAROTO**

IP65 Aluminium  
Colour/s: White, Black



NS225

240V 9W 3K LED  
triac dimmable  
Output: 930 lumen, 40 degree  
Size:: 124H\*75\*75W  
Reflector options: Black, White, Silver, Gold

**RUAWAI**

IP20 Aluminium  
Colour/s: White, Black,



NS226

240V 10W 3K COB LED  
triac dimmable  
Output: 965 lumen, CRI80, 40 degree beam  
Size: 80Ø\*130H  
Reflector options: White, Black, Silver, Gold

**MATARANGI**

IP20 Aluminium  
Colour/s: White, Black



NS227

240V 12W 3K COB LED  
triac dimmable  
Output: 1500 lumen, CRI80, 40 degree beam  
Size: 90Ø\*150H  
Reflector options: White, Black, Silver, Gold

**NGATEA**

IP20 Aluminium  
Colour/s: White, Black, Champagne



NS221

240V 9W 3K LED  
triac dimmable  
Output: 1135 lumen, CRI80, 40 degree beam  
Size: 93\*93W\*115H

# SMD DOWNLIGHTS

**Ideal for lighting large areas due to their wide beam.**

SMD Downlights provide diffused light which is effectively a full 180 degree beam and very suitable for general lighting situations.

## CLUTHA

IP44 Aluminium  
Colour: White



### DL400

240V 10W 3K LED  
triac dimmable  
Output: 750 lumen  
Size: 110Ø\*45H  
Beam Angle: 90 degree  
Cut-out: 90Ø (will fit 90-98Ø)

## CROMWELL

IP44 Aluminium  
White, Black, Satin Chrome



### DL401

240V 13W 3K LED  
triac dimmable  
Output: 950 lumen  
Size: 110Ø\*45H  
Cut-out: 90Ø (will fit 90-98Ø)

## DUNSTAN

IP44 Aluminium  
Colour/s: White, Black




### DL402

240V 13W 3K LED  
triac dimmable  
Output: 950 lumen  
Size: 110W\*110W\*45D  
Cut-out: 90Ø (will fit 85-100Ø)

## WANAKA

IP44 Aluminium  
Colour/s: White, Black,  
Satin Chrome

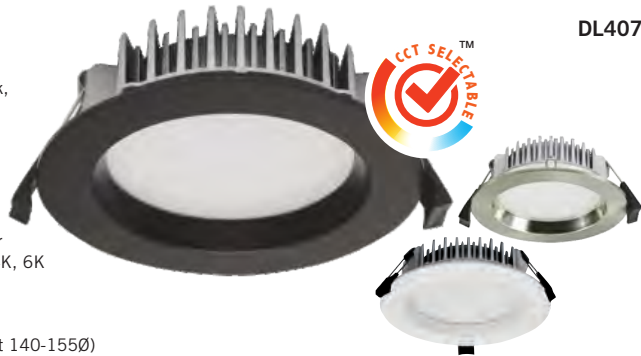

### DL407

240V 13W 3K LED or  
CCT switchable 3K, 4K, 6K  
triac dimmable  
Output: 1000 lumen  
Size: 170Ø\*55H  
Cut-out: 140Ø (will fit 140-155Ø)

## TIMARU

IP44 Aluminium  
Colour/s: White, Satin Chrome



### DL403

240V 13W 3K LED  
triac dimmable  
Output: 1100 lumen  
Size: 145Ø\*55H  
Cut-out: 120Ø (will fit 118-135Ø)

## TE ANAU

IP44 Aluminium  
Colour: White only



### DL408

240V 18W 3K or 4K LED  
non dimmable  
Output: 1700 lumen  
Size: 170Ø\*55H  
Cut-out: 140Ø  
(will fit 140-155Ø)



**BULLER**

IP44 Economy contractor model  
Built in driver  
Colour: White

**DL54**

240V 10W 3K LED  
triac dimmable  
Output: 850 lumen  
Size: 115Ø\*61H  
Cut-out: 90Ø (will fit 90-105Ø)

**MILFORD**

IP44 Economy contractor model  
Built in driver  
Colour: White

**DL55**

240V 13W 3K LED  
triac dimmable  
Output: 1000 lumen  
Size: 145Ø\*61H  
Cut-out: 125Ø (will fit 110-132Ø)

**OAMARU**

IP54 front face, polycarbonate  
Deep reflector, anti glare  
Colour: White

**DL56**

240V 10W 3K LED  
triac dimmable  
Output: 840 lumen  
Size: 115Ø\*71H  
Cut-out: 90Ø (will fit 90-95Ø)

**WESTPORT**

IP44 polycarbonate  
Colour: White

**DL222**

240V 16W LED  
Size: 235Ø\*50H  
Cut-out: changeable from  
65 - 205Ø CCT switch 3K/4K/6K

**BLUFF**

IP44 Aluminium  
Colour: White


**DL30**

30 degree tilt 240V 13W 3K LED  
triac dimmable  
Output: 1000 lumen  
Size: 110Ø\*50H  
Cut-out: 95Ø

# MODULE KIT *for* DOWNLIGHTS

Replaceable LED module to upgrade existing halogen lamps to LED.  
Or purchase with any of our compatible downlights as a complete fitting.

MOD5-8WKIT

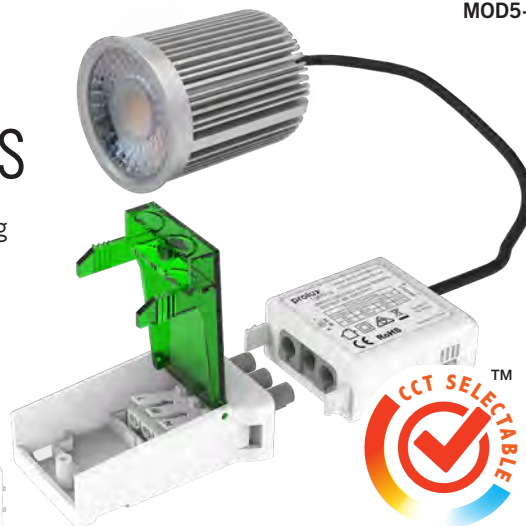**MOD 5-8W KIT**

Switchable 5W-8W output.  
CCT switch 3K, 4K, 6K  
Quick connect driver with looping terminals

**IC-F**

Abut & cover. Can install under insulation.  
Distance to timber building elements 25mm



SEE OUR FULL RANGE OF  
MODULE DOWNLIGHTS online at...  
[www.prolux.co.nz](http://www.prolux.co.nz)



### SPRINGFIELD

IP20 Acrylic shade, aluminium base  
Colour: White, Brush aluminium

#### C330

240V 19W 3K LED  
non dimmable  
Size: 330Ø\*80D



#### C260

240V 13W 3K LED  
non dimmable  
Size: 260 diam \* 80D



### LUGGATE

UL3400

IP54 Aluminium & PC diffuser  
Colour: Black



240V 25W 3K LED  
non dimmable  
Size: 240\*240\*50D

### TITOKI

IP54 Indoor/ outdoor polycarb  
Colour: White



#### C115D-18W

Double insulated  
240V 18W  
3K, 4K LED triac dimmable  
Output: 1450 lumen  
Size: 300Ø\*35D

#### C116D-25W

Double insulated  
240V 25W 3K LED  
triac dimmable  
Output: 1600 lumen  
Size: 350Ø\*35D

### HIKURANGI

IP54 Indoor/ outdoor polycarb  
Colour: White



#### C117-18W

Double insulated  
240V 18W 3K LED  
non dimmable  
Output: 1450 lumen  
Size: 300\*300W\*35D

### OMANA

IP54 Indoor/ outdoor polycarb  
Colour: Black



#### CL87-18W

Double insulated  
240V 18W 3K or 4K LED  
triac dimmable  
Output: 1800 lumen,  
120 degree  
Size: 275Ø\*65D

#### CL87-25W

Double insulated  
240V 25W 3K or 4K LED  
non dimmable  
Output: 2600 lumen,  
120 degree  
Size: 350Ø\*65D

### TIKIPUNGA

IP54 Indoor/ outdoor polycarb  
Colour: White



#### C114-12W

Double insulated  
240V 12W 3K LED  
non dimmable  
Output: 1100 lumen  
Size: 200Ø\*35D

**DB08-600**

240V 20W 4K LED  
**Output:** 2040 lumen  
**Size:** 625L\*59W\*59H

**DB08-1200**

240V 40W 4K LED  
**Output:** 3860 lumen  
**Size:** 1225L\*59W\*59H

**DB08-1500**

240V 45W 4K LED  
**Output:** 4660 lumen  
**Size:** 1525L\*59W\*59H

**WAIKARI**

IP20 Steel  
 non dimmable

**DB31-1200**

240V 40W 4K LED  
**Output:** 4200 lumen  
**Size:** 1200L\*71W\*63H

**DB31-1500**

240V 50W 4K LED  
**Output:** 5200 lumen  
**Size:** 1500L\*71W\*63H

**KAE0**

IP54 Steel  
 non dimmable  
**Colour:** White

**TRYPHENA**

IP20 Aluminium & plastic  
**Colour:** White ends, aluminium finish body

**AL17**


240V 42W 3K LED  
 non dimmable  
**Output:** 3800 lumens  
**Size:** 1210L\*75W\*25D  
 Loose flying lead for easy positioning

**PIPIWAI**

IP20 Steel & plastic  
 Stylish residential alternative  
**Colour/s:** White, Black

**DB21**

240V 40W 3K LED  
 non dimmable  
**Output:** 4200 lumens  
**Beam:** 120 degrees  
**Size:** 1200L\*90W

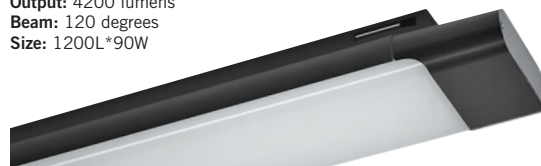**OG-LED-1200**


240V 40W 4K LED  
**Output:** 3400 lumens  
**Size:** 1195L\*83W\*74H

**OG-LED-1500**

240V 50W 4K LED  
**Output:** 5300 lumens  
**Size:** 1500L\*83W\*74H

**PANGURU**

IP20 Steel & PC  
**Colour:** White  
**Beam spread:** 150 degrees  
 Rear entry power feed

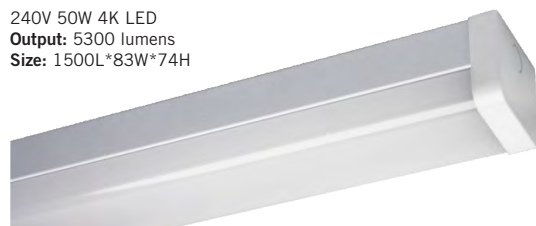



PAGE  
**16**

# residential spots

For **COMMERCIAL SPOTS & Track** refer

page **59**

**RANGIRIRI**

IP20 Aluminium  
Colour/s: White, Black

**SR800D-13W**

240V 13W 3K or 4K LED  
triac dimmable  
**Output:** 1200 lumen  
Supplied with 50 degree reflector  
**Other options:** 10,20,30,50 degree  
**Size:** 120L\*75Ø

**WAIUKU**

IP20 Aluminium  
Colour/s: White, Black

**SA294C-9.5W**

240V 9.5W 3K or 4K LED  
non dimmable  
**Output:** 700 lumen  
Supplied with 50 degree reflector  
**Other options:** 10,20,30,40,50 degree  
**Size:** 140L\*60Ø

**TUAKAU**

IP20 Aluminium  
Colour/s: White, Black, Silver

**SA294CD-13W**

240V 13W 3K or 4K LED  
triac dimmable  
**Output:** 1200 lumen  
Supplied with 50 degree reflector  
**Other options:** 10,20,30,40,50 degree  
**Size:** 140L\*60Ø

**TIRAU**

IP20 Aluminium swivel & tilt  
Colour/s: White, Black

**SW-010S-HT  
SW-010S-HW4**

triac dimmable  
240V 17W 3K LED  
Includes either HT or HW4 adaptor  
**Size:** 152W\*132H drop

**TAPORA**

IP20 Aluminium swivel & tilt  
Colour/s: White, Black

**SA215**

triac dimmable  
240V 9W 3K LED  
**Output:** 740 lumen  
**Beam angle:** 36 degree  
**Size:** 75Ø\*91H

**FITZROY**

Colour/s: White, Black

**SA294CR-13W**

Rod 100 - 500mm  
Cut to any length  
**Size:** 600L overall

# QUALITY COMPONENTS

Top quality components producing an exceptional quality of light.

**FEATURES**


Built in driver & lamps

**TRACK ADAPTORS**

Supplied with fitted HT adaptor.

**GUG-6W 3K, 4K**

240V GU10  
triac dimmable  
High output  
GE brand GU10 lamp

**R1005**

Also available on round base plate  
**Size:** 70Ø\*25D  
**Colours:** White, Black

**R1003**

Also available on round base plate  
**Size:** 100Ø\*30D  
**Colours:** White, Black, Silver,



Refer TRACK

Page **19**

**BASE OPTIONS**

Spots are supplied with track adaptor  
Alternatively order base or recessed plate

**FEATURES**

- Affordable LED spot option
- No driver required
- Triac dimmable
- Attractive flush adaptor design
- Neat & tidy - smallish spot
- Output ideal for residential
- Easy to change lamps

**GU10 LED LAMPS**

Recommended a good quality branded lamp is used  
Budget lamps are likely to give very poor quality  
light & fail easily, compromising the installation



**PETONE**

**HSP203**

Colour/s: White, Black,  
Silver



**KARAPIRO**

**HSP2810**

Colour/s: White, Black, Silver



**RUATORIA**

**HSP294.100**

Colour/s: White, Black



**KOPU**

**HSP294.200-400mm**

Rod: Can be cut to length  
Colour/s: White, Black



**MONOWAI**

**HSP295**

White, Black, Silver



**WAIHI**

**HSP286**

Colour's: White, Black, Silver



**HAWEA**

**HSP287**

Colour/s: Black, Silver




**HTC TRACK****RECESSED TRACK FOR HT SPOT SYSTEM**

240V 16 Amp 1 circuit (3 wire) phase, neutral &amp; earth

**Length options:** 1m, 2m, 3m. Cut to any length

End feed &amp; end cap priced separately

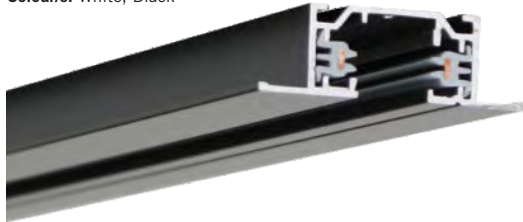**Size:** Outer trim 55W\*18H, Cutout 40W**Colour/s:** White, Black**TRACK COVER STRIP****Colours:** White, Black

Cut to length strips to conceal the gap between fitting.

**HT TRACK****SURFACE TRACK FOR HT SPOT SYSTEM**

240V 16 Amp 1 circuit (3 wire) phase, neutral &amp; earth





**Length options:** 1m, 1.5m, 2m, 3m or cut to any length.

Includes end feed &amp; end cap









**Size:** 35W\*17H**Colour/s:** White, Black, Silver**TRACK COVER STRIP****Colours:** White, Black

Cut to length strips to conceal the gap between fitting.


19

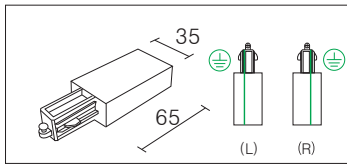**TRACK COMPONENTS**HT-ECAP  
HTC-ECAP  
End capHT- J01  
HTC-J01  
JoinerHT- L01  
HTC-L01  
Live feed

HT- J02

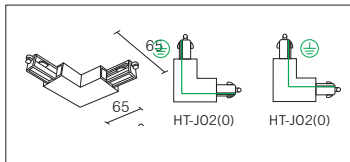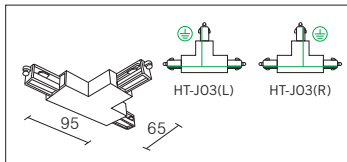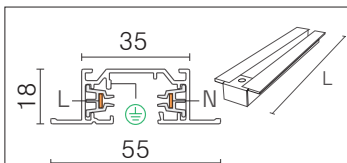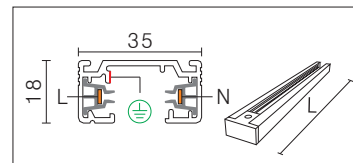HT-J02  
HTC-J02  
L joinerHT- J03  
T-joinerHT- J04  
Cross joinerHT- J05  
Flexible bendHTC-F01  
Recessed fixing  
bracketHT- J09  
Suspension kitHTC-2.0  
HTC-3.0HT-1.0  
HT-1.5  
HT-2.0  
HT-3.0

**VERSATILE**

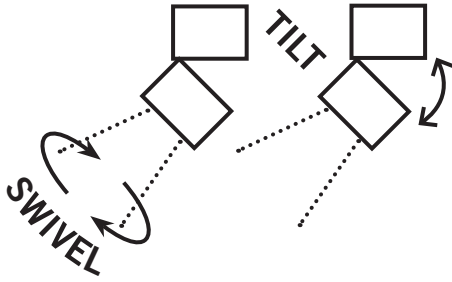

**WELLSFORD**

**NS215B**

IP20 Aluminium  
Colour: White

240V 9.5W 3K or 4K LED  
triac dimmable  
Output: 945 lumen, CR180  
Beam: 36 degrees  
Size: 75Ø\*91H



**TE HANA**

**NS215**

IP20 Aluminium  
Colour/s: White, Black,



240V 9.5W 3K or 4K LED  
triac dimmable  
Output: 945 lumen, CR180  
Beam: 36 degrees  
Size: 75Ø\*91H



**ALBANY**

**NS216**

IP20 Aluminium  
Colour/s: White, Black



240V 14W 3K or 4K LED  
triac dimmable  
Output: 1474 lumen, CR180  
Beam: 36 degree  
Size: 100Ø\*103H





**WAIRAKI****FH716-MBP**

Single on base  
**Base:** 70\*120W  
**Colour/s:** White, Black

**LEVIN****FH716-SW**

Base with switch  
**Base:** 70W\*120H  
**Colour/s:** White, Black

**GU10 Spot Lights**

IP20 Aluminium  
 240V GU10 LED

- Replaceable GU10 lamps
- New contemporary European spot
- Cast aluminium head and base
- Attractive swivel mechanism
- Tilt 90° Swivel 270°

**LAMP:** *see note below*

- White with graphite accents
- Black with graphite accents

**SUITABILITY**

Indoor only, excluding bathrooms & similar wet areas.

**GU10 LED LAMPS**

Lamps not included - order separately.  
 Recommend a good quality branded lamp is used. Budget lamps are likely to give very poor quality light & fail easily.  
*Refer below.*

**NAPIER****FH716-2P**

**Base:** 172Ø  
**Colour/s:** White, Black

**HASTINGS****FH716-3P**

**Base:** 212Ø  
**Colour/s:** White, Black

**WAIROA****FH716-4P**

**Base:** 210\*210W  
**Colour:** White

**HEREKINO****FH716-2B**

**Base:** 322L\*72W  
**Colour/s:** White, Black

**TAIHAPE****FH716-3B**

**Base:** 540L\*72W  
**Colour/s:** White, Black

**DEVONPORT****FH716-4B**

**Base:** 752L\*72W  
**Colour/s:** White, Black

**GUG-6W 3K, 4K**


240V GU10  
 triac dimmable  
 High output  
 GE brand GU10 lamp  
 Quality German brand

**NEW  
PRODUCT**

**CLEVEDON**  
Slimline linear pendant

IP20 Aluminium

**Suspension:** 1,5m adjustable  
Power feed integrated with suspension  
- no extra cable  
Light output up and down  
240V, 54W down & and 18W up  
4860 lumens down  
1620 lumens up  
3K LED  
triac dimmable  
CRI 82  
**Colour:** Black

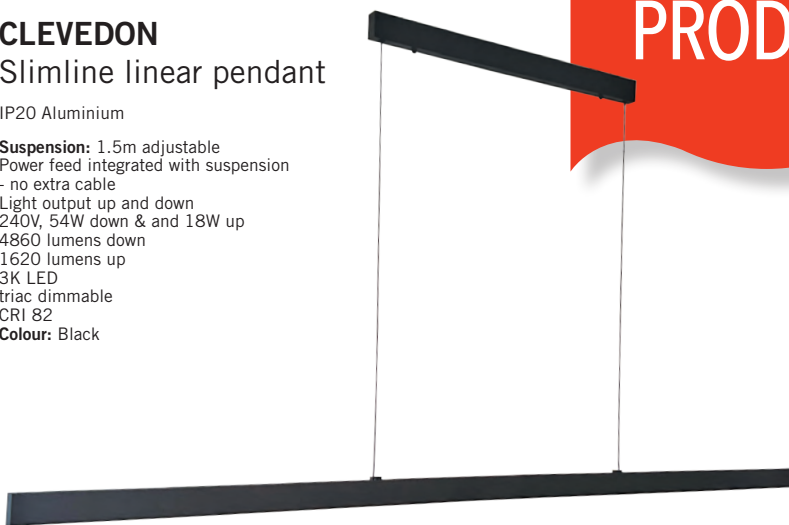

**OPAL  
DIFFUSER**

LS2555P

Size: 2260 x 25  
x 55mm H



**OPTICAL  
LENS**

LS2555L

Size: 2080 x 25  
x 55mm H



Gold reflector option

# LINEAR LED PENDANTS *or* SURFACE

A versatile design that effortlessly integrates into any space - residential or commercial.

- Exceptional efficiency.
- Easy to install
- Offers the perfect balance between ambient and task lighting.

## HUNUA

IP20 Aluminium, opal diffuser, aluminium end caps.  
**Colours:** White, Black  
 Suspended or surface mount with components included.  
 Linkable using joiner bars.  
 triac dimmable.

**LS5080**  
 Light shines down only (60W, 5400 lumen)  
 240V CCT switch selectable  
 3K/4K/6K

**LS5080-2250**  
 Light shines down only (60W, 5400 lumen)  
 240V 3K or 4K

**LS5080-2250UD**  
 Light shines up and down (60W 5400 lumen down, 30W 2700 lumen up)  
 240V 3K or 4K

**Size:** 2250L\*50W\*80H  
 Suspensions: 2m adjustable, 3m on request

**LS5080-JB**  
 Straight joiner

**LS5080-LJ**  
 Corner join

**JOINING**  
 Channel is prewired 240V either end.  
 Corners joins have their own integrated drivers and LED's.  
 Only one power feed required on continuous runs.  
 Joiner bars provide for a solid connection.

**BEST  
SELLER**



## MOKOHINAU

IP40 Aluminium, opal diffuser, aluminium end caps  
**Colours:** White, Black

**TL66D-1500** Light shines down only

**TL66-UD-1500** Light shines up and down

Linkable with straight joining & right angle bend  
 Suspended or surface mount with components included  
 240V 42W 3K LED or  
 CCT Selectable 3K, 4K, 6K  
 dimmable (triac)

**Output:** 4500 lumen, 90 degree beam  
**Size:** 1504L\*56W\*75H  
**Suspensions:** 1.5m adjustable  
 (or 3m to order)



**TL66-J**  
Straight joiner



**TL66-LJ**  
Right angle joiner

## MATAKANA

Suspended or surface mount  
 Stand alone or continuous system  
 Quality components  
 Osram flicker-free driver



**QUALITY**  
 No light leakage when joining channels  
 Osram German brand driver



### SURFACE MOUNT

Involves partial disassembly & drilling of holes through back plate.  
 Instructions included.

### GZ6588-54W

**Colour:** Black, White  
 240V 54W 4K LED non dimmable  
**Output:** 4900 lumen  
**Size:** 1800L\*65W\*88H.  
**Drop:** 1850L  
**Colour:** Black, White

### GZ805A-72W

240V 72W 4K LED non dimmable  
**Output:** 7200 lumen  
**Size:** 2250L\*68W\*88H.  
**Drop:** 1850L  
**Colour:** White


### GZ6588-72W

IP20 Die aluminium  
 240V 72W 4K LED non dimmable  
**Output:** 6500 lumen  
**Size:** 2250L\*65W\*88H.  
**Drop:** 1850L  
**Colour:** Black



### GZ-LJ

Joiner bends with built-in lamps & driver



### GZ-JB

3 Piece joiner bar set

## WAKEFIELD

IP20 Aluminium & opal PC diffuser  
**Colour:** Black

### PDB25-1600

Light shines down only  
 240V 60W 3K or 4K LED  
 non dimmable

**Output:** 4800 lumen, 120 degree beam

**Size:** 1620L\*115W\*50H

**Suspensions:** 1.5m adjustable



## LOWBURN

IP40 Aluminium, parabolic louvre, aluminium end caps  
**Colour:** Black

### TL67-1500


Suspended or surface mount with components included

Light shines down only  
 240V 42W 4K LED  
 non dimmable

**Output:** 4500 lumen, 90 degree beam

**Size:** 1504L\*56W\*75H

**Suspensions:** 1.5m adjustable  
 (or 3m to order)

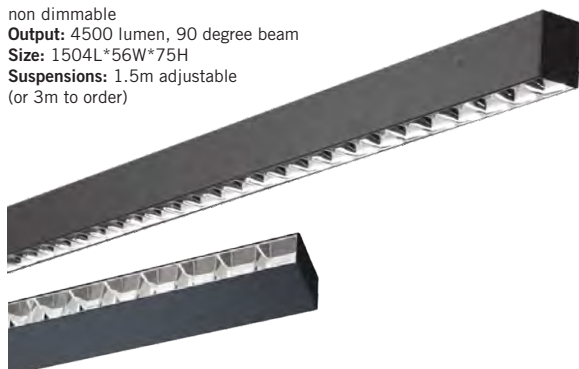

## KARETU

IP20 Aluminium, optical lens linear pendant

**Colour:** White body & black underface

Suspended or surface mount with components included

**Quality:** Osram (German brand) flicker free driver

**Beam spread:** 90 degrees

**Suspensions:** 2m adjustable, 3m on request

### LS3580-1700

240V 30W 3K non dimmable

**Size:** 1700L\*35W\*80H

### LS3580-2250

240V 40W 3K or 4K non dimmable

**Size:** 2250L\*35W\*80H



**MT-2M**

IP20 Aluminium surface channel  
Linkable with joiners  
24Vdc 8A maximum  
**Size:** 2000L\*39W\*76H - or cut to length

**MT-J**

Straight joiner kit

**MT-LJ**

Right angle bend

**MT-CS**

Plastic cover infill strip

**MT-EC**

End cap

**DESCRIPTION**

- Aluminium magnetised channel maximum 2m long linkable
- The spots & blades simply slot in
- The system runs off a 24V power supply (LED driver) which needs to be remotely located
- Additional fittings can be introduced provided the driver supplied allows for extra capacity
- System can be dimmable by special order driver

**POWER SUPPLIES**

Available on request or see web site  
More photos & info online at [www.prolux.co.nz](http://www.prolux.co.nz)

**MT60**

Protruding diffused blade  
IP20 Aluminium

24V 13W 3K LED  
non dimmable

**Output:** 620 lumen CR180

**Beam angle:** diffused

**Size:** 320L\*34W\*110H



**MT62**

Flush diffused blade  
24V 13W 3K LED

non dimmable

**Output:** 620 lumen CR180

**Beam angle:** diffused

**Size:** 320L\*34W\*56H



**MT66**

Flush optical lens blade  
24V 16W 3K LED

non dimmable

**Output:** 1450 lumen CR180

**Beam angle:** 34 degree

**Size:** 320L\*34W\*56H

**MT72**

Spotlight  
24V 8W 3K LED

non dimmable

**Output:** 280 lumen CR1-80

**Beam angle:** 30 degrees



# SURFACE CHANNEL



## AP116C

2m Channel only including end caps & fixing clips

**Profile size** 18W\*8.5H\*2000L

**Recommended tape:**  
FS-COB or FS-12V-15W or FS-24V-15W



## AP112C

2m Channel only including end caps & fixing clips

**Profile size** 23.5W\*10H\*2000L

**Recommended tape:**  
FS-COB or FS-12V-15W or FS-24V-15W



## AP110C

2m Channel only including end caps & fixing clips

**Profile size** 16W\*16H\*2000L

**Recommended tape:**  
FS-COB or FS-12V-15W or FS-24V-15W



## AP176C

2m Channel only including end caps

**Profile size** 26W\*23H\*2000L

**Recommended tape:**  
FS-COB or FS-12V-15W or FS-24V-15W

27

# RECESSED CHANNEL



## AP104C

2m Channel only including end caps

**Profile size** 25W\*7H\*2000L

Recess width 17.4W

**Recommended tape:**  
FS-COB or FS-12V-15W or FS-24V-15W




## AP133C

2m Channel only including end caps

**Profile size** 30.3W\*10H\*2000L

Recess width 23.5W

**Recommended tape:**  
FS-COB or FS-12V-15W or FS-24V-15W




## AP101C

2m Channel only including end caps. Recessed deeper profile for diffused light

**Profile size** 25W\*14.5H\*2000L


Recess width 17.4W  
**Recommended tape:** FS-COB or FS-12V-15W or FS-24V-15W.




Fixing clip AP116 included



Fixing clip AP110 included



Fixing clip AP112 included



Fixing clip AP176  
Clips in easily

### SUITABILITY

IP20 Indoors commonly used in cabinet joinery, cupboards. Supplied standard with 300mm tails

### COMPATIBILITY


Ordering as a kit to ensure compatibility

### DRIVERS & LED tape

See pages Power Supplies & LED Tape

### FEED CABLE

Supplied standard with 300mm tails

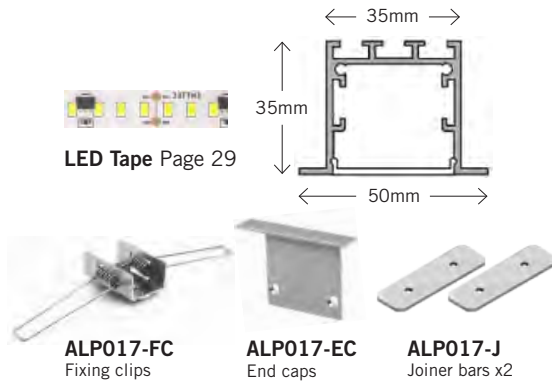

### ALP017

Recessed aluminium channel with opal matt diffuser



**Profile size:** 2000L\*50W\*35D.

**Cutout:** 35W

**Output:** 25W 2100 lumen per meter with single strip

**Recommended:** FS-12V-25W or FS-24V-25W double array tape

**Colour/s:** White, Black, Anodized silver

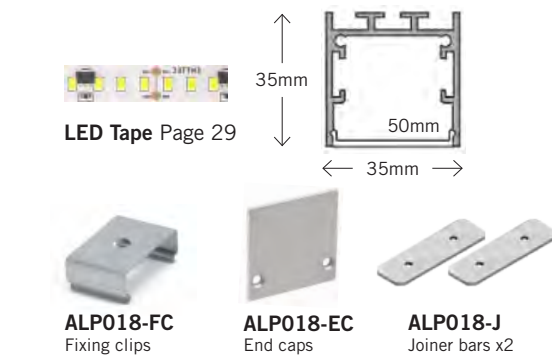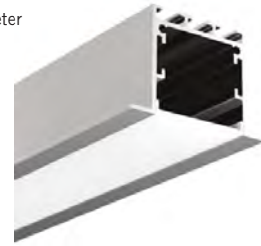

### ALP018


Aluminium channel with opal matt diffuser

**Profile size:** 2000L\*35W\*35D.

**Output:** 25W 2100 lumen per meter with single strip

**Recommended:** FS-12V-25W or FS-24V-25W double array tape

**Colour/s:** White, Black, Anodized silver

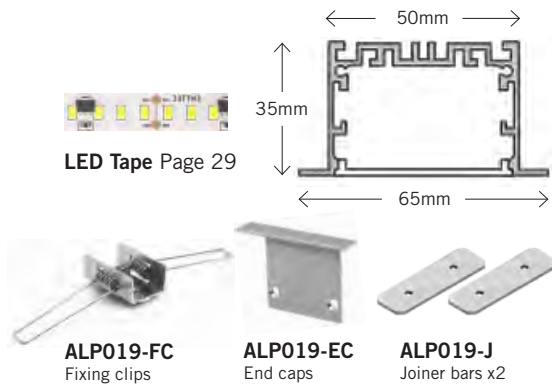

### ALP019


Recessed aluminium channel with opal matt diffuser

**Profile sizes:** 2500L\*65W\*35D

**Output:** 25W 2100 lumen per meter with single strip

**Recommended:** FS-12V-25W or FS-24V-25W double array tape

**Colour/s:** White, Black, Anodized silver

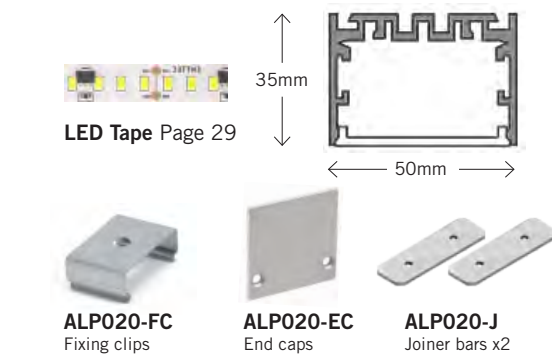

### ALP020

Aluminium channel with opal matt diffuser

**Profile size:** 2500L\*50W\*35D

**Cutout:** 50W

**Output:** 25W 2100 lumen per meter with single strip

**Recommended:** FS-12V-25W or FS-24V-25W double array tape

**Colour/s:** White, Black, Anodized silver




**COMPONENTS**

End caps, joiners, clips & tape priced separately


**FACTORY CUTS**

Straight or angle cuts on request



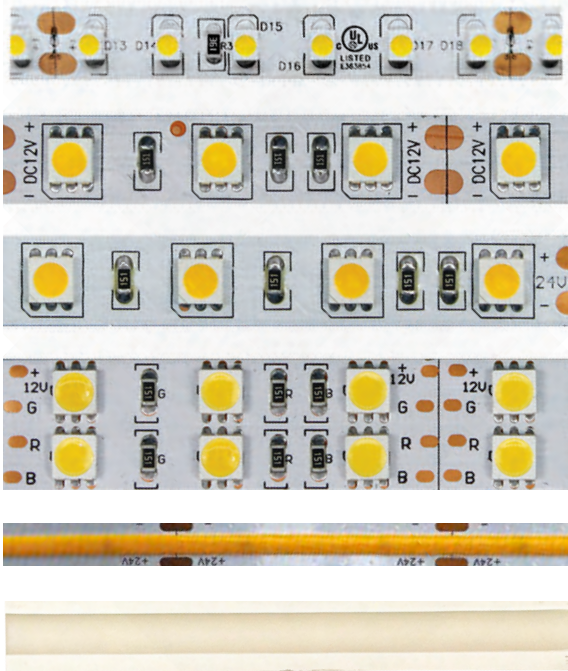

- ◀ **FS-12V-4.8W**  
Colour temp: 3K, 4K
- ◀ **FS-12V-9W**  
Colour temp: 3K, 4K
- ◀ **FS-12V-15W**  
Colour temp: 3K, 4K, **Blue**
- ◀ **FS-24V-15W**  
Colour temp: 3K, 4K
- ◀ **FS-12V-25W**  
Colour temp: 3K, 4K
- ◀ **FS-24V-25W**  
Colour temp: 3K, 4K
- ◀ **FS-COB-24V-10W**  
Colour temp: 3K, 4K
- ◀ **FS-COB-24V-15W**  
Colour temp: 3K, 4K  
IP65

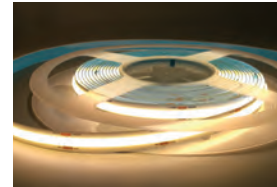

COB Constant Voltage LED  
3M Brand adhesive backing  
40,000 hours life

CODE	INPUT	LED'S PER M	LED TYPE	ROLL LENGTH	CUT WIDTH	MAX RUN	COLOUR TEMP	WATTS PER M	LUMEN PER M	
FS-12V-4.8W	12V	60	3528	5m	5cm	5m	3K or 4K	4.8W	370	
FS-12V-9.6W	12V	60	3528	5m	2.5cm	5m	3K or 4K	9.6W	650	
FS-12V-15W	12V	60	5050	5m	5cm	5m	3K or 4K	15W	1200	
FS-24V-15W	24V	60	5050	10m	10cm	10m	3K or 4K	15W	1200	
FS-12V-25W	12V	120	5050	10m	5cm	5m	3K or 4K	25W	2000	
FS-24V-25W	24V	120	5050	10m	5cm	10m	3K or 4K	25W	2000	
FS-COB-24V-10W	24V	NA	COB	10m	5cm	10m	3K or 4K	10W	1100	
FS-COB-24V-15W	24V	NA	COB	5m	2.5cm	10m	3K or 4K	15W	1500	IP65

**Constant voltage drivers**  
- Non dimmable

- Q4-12V-6W**  
Input 240V, Output 12V 6W
- Q4-12V-12W**  
Input 240V, Output 12V 12W
- Q4-12V-20W**  
Input 240V, Output 12V 20W
- Q8H-12V-40W**  
Input 240V, Output 12V 40W
- Q8H-12V-50W**  
Input 240V, Output 12V 50W
- Q2-12V-75W**  
Input 240V, Output 12V 75W
- AED-24V-30W**  
Input 240V, Output 24V 30W
- Q3-24V-36W**  
Input 240V, Output 24V 36W
- Q3-24V-50W**  
Input 240V, Output 24V 50W
- Q3-24V-75W**  
Input 240V, Output 24V 75W

**Constant Voltage drivers**  
- TRIAC dimmable

- DIM-24-50W**
- DIM-12-50W**  
Size: 184\*61\*52
- SC100-12V, SC100-24V**  
Size: 230\*70\*46
- SC150-12V, SC150-24V**  
Size: 256\*78\*47
- SC200-12V, SC200-24V**  
Size: 256\*78\*47
- SC36012V, SC360-24V**  
Size: 336\*121\*61

**SUITABILITY**

Indoor IP20 tape is not suitable in areas exposed to moisture

**VOLTAGE CHOICE**

The 24V can run twice the distance & costs the same as 12V

**INSTALLATION**

Constant voltage must be wired in parallel

**ORDERING**

Specify feed cable length - standard is 300mm



SMD Constant Voltage LED  
3M Brand adhesive backing 40,000  
hours life

Just landed...

### NASEBY


IP20 Aluminium with base switch.  
Head pivots 180 degrees  
**Colour/s:** White, Black

240V 4W LED  
**CCT:** Switchable  
3K/4K/6K  
**Output:**  
470-550 lumen.  
non dimmable  
**Size:** 159\*69\*132D




### DANNEVIRKE

IP20, Polycarbonate  
Double insulated  
180 degree tilt head  
**Colour/s:** White, Black, Chrome

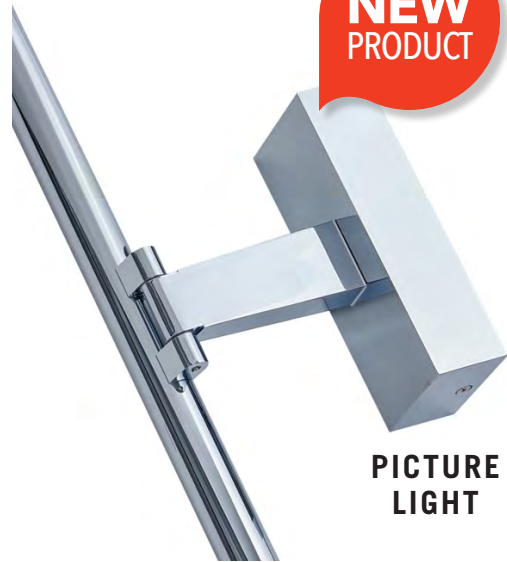

240V 12W 3K or 4K or 6K  
non dimmable  
**Output:** 960 lumen CRI:80  
**Size:** 634mm long, base 142\*60\*35mmD

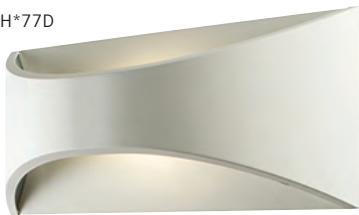**PORTLAND****W1800D**IP20 Aluminium  
Colour/s: White, BlackLight 50/50 up down  
240V 7W 3K LED  
triac dimmable  
Size: 180W\*80H\*90D**NEW  
PRODUCT****NASEBY****W50**IP20 Aluminium with base  
switch.  
Head pivots  
180 degrees  
Colour/s: White, Black240V 4W LED  
CCT: Switchable  
3K/4K/6K  
Output:  
470-550 lumen.  
non dimmable  
Size: 159\*69\*132D**BEDSIDE  
LIGHT****PIHA****W1934  
W1934D**  
triac dimmable\*IP20 Aluminium  
Colour/s: White, Silver  
240V 8.5W 3K LED  
Size: 150W\*90H\*90D**MURIWAI****HL531**IP65 Aluminium - up & down light  
Colour: White240V 6W 3K LED  
non dimmable  
Size: 220W\*90H\*77D**KAREKARE****W1705**IP20 Aluminium  
Colour/s: White, Black  
Shines 85%,15% down  
240V 9.2W 3K LED triac dimmable  
Output: 942 lumen  
Size: 205W\*126H\*95D**ORETI**IP54 Aluminium  
Colour/s: White, Black**UL7715**Light 50/50 up down  
240V 8W 3K LED  
Output: 370 lumens  
Size: 110W\*110H\*95D**HAURAKI**IP54 Aluminium  
Colour/s: White, Black, Graphite**UL7720**Light 50/50 up down  
240V 10W 3K LED  
Output: 450 lumens  
Size: 140W\*140H\*110D**SUMNER**IP54 Aluminium up down light  
Colour/s: White, Black, Graphite**UL7710**240V 6W 3K LED  
Size: 67W\*165H\*89D

### WHITFORD

NSB600

IP54 Aluminium  
Colour/s: White, Black




Suitable as picture, vanity or wall wash, up or down  
240V 10W 3K LED non dimmable  
Output: 610 lumen  
Size: 600L\*115D\*40H

### WAIMATE

W633

IP20 Aluminium  
240V 12W 3K or 4K LED non dimmable

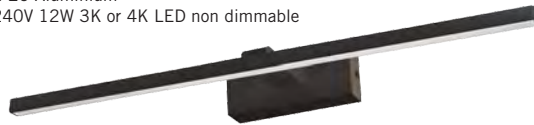

Size: 600L\*140D  
Colour/s: White, Black

### CORONET

IP20 Stainless steel fixed arm & head

#### MB537/8W

240V 8W 3K or 4K LED  
non-dimmable  
Size: 452L\*125D  
Base: 125W\*45H



#### MB537/12W

240V 12W 3K LED  
non dimmable  
Size: 570L\*125D Base: 125W\*45H




### THORNDON

MB542/8W

IP20 Steel, swing arm adjustment & tilt head  
Colour: Chrome Suitable as picture light

240V 8W 370 lumen  
3K or 4K LED

non dimmable  
Size: 450L\*185D  
Base: 125W\*45H

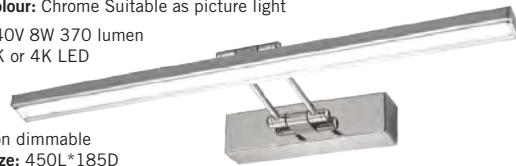


### HERMITAGE

MB113/12

IP20 Plastic double insulated  
Colour/s: Satin chrome

240V 12W 3K or 4K LED, non dimmable  
Size: 700L\*60D



**NGAROTO**

IP20 Aluminium

**W1933/20**

240V 20W 3K or 4K LED  
non dimmable  
Size: 500L\*125D  
Colour/s: White, Black, Silver

**W1933/16**

240V 16W 3K or 4K LED  
non dimmable  
Size: 400L\*125D  
Colour: White, Black

**MILTON**

IP20 Alumium,  
180 degree light spread  
240V 18W LED 3K or 4K  
non dimmable

Size: 600L\*95D  
Colour/s: White, Black

**W641****ROXBURGH**

IP20 Aluminium  
Tilt 180 degree out to down  
Colour/s: Black

240V 30W 3K LED  
non dimmable  
Size: 887mm (L) \*Base 190Ø \*75 \*35mm (D)

**MB709****STRATFORD**

IP20 Steel  
Colour: Chrome

240V 12W 3K or 4K LED, non dimmable  
Size: 590L\*130D

**MB550/12****DANNEVIRKE**

IP20, Polycarbonate  
Double insulated 180 degree tilt head  
Colour/s: White, Black,  
Chrome

240V 12W 3K or 4K or 6K  
non dimmable  
Output: 960 lumen CRI:80  
Size: 634mm long, base 142\*60\*35mmD

**PICTURE LIGHT****NEW PRODUCT****MB666**

34



Tussock House , Central Otago

Part of New Zealand's landscape since 1994



35



PAGE

**36**



**cabinet  
recessed**



**MURIWAI**

IP40 Aluminium  
Colour: White

Swivel and 20 degree tilt  
240V 3.3W 3K LED  
**Output:** 180 lumen, CR180  
**Size:** 50Ø\*32H.  
**Cutout:** 45Ø  
**Classification:** IC-F



DL138

**WARKWORTH**

IP44 Aluminium & PC diffuser  
Colour: White

Swivel 270 degree & tilt 15 degree  
240V 2.5W 3K LED non dimmable  
Constant current - series wiring  
**Output:** 200 lumen, CR180  
**Beam angle:** 50 degree  
**Size:** 70Ø\*10d.  
**Cutout:** 60Ø  
Ultra thin for 10mm thick joinery  
**Classification:** CA80



DG-F03D

**OREWA**

IP20 Steel & glass  
Colour: Brush chrome

12V 3W 330MA 3K LED  
Constant current - series wiring  
Drivers supplied separately  
Supplied with 2m tails  
**Size:** 65Ø\*20D.  
**Cutout:** 57Ø



A10004

**WAIWERA**

IP44 CNC aluminium & glass  
Colour: Brush aluminium

12V 2.5W 350ma 3K LED  
Constant current - series wiring  
Drivers supplied separately  
**Size:** 60Ø\*10D.  
**Cut-out:** 50Ø  
Ultra thin 10mm for finer joinery  
**Classification:** Ca80



DG-F03

**NEW  
PRODUCT**

**ROUTE BURN**  
**Stairlights** *with*  
*interchangeable*  
*Face Plates*



**LDL68**  
IC-F  
IP20 Aluminium or Glass  
500mA 1.5W LED  
3K or 4K  
CRI 90  
non-dimmable  
**Size:** Cut out 60mm Ø \*65mm  
deep

CHOICE OF 6  
MAGNETIC  
INTERCHANGEABLE  
FACE PLATES IN  
GLASS OR ALUMINIUM



LDL68SQ



LDL68GSQ



LDL68R



LDL68GR



LDL68R-BK



LDL68SQ-BK

**MANLY**

IP20 CNC aluminium  
Colour/s: White, Black



350mA 1W 3K LED Non dimmable  
Size: 50Ø.  
Cut-out: 43Ø

LDL-W01

**KAWAU**

IP20 CNC aluminium



**LDL-W02**

350mA 1W 3K LED  
non dimmable  
Size: 50\*50W. Cut-out: 43Ø  
Colour/s: White, Black, Brush  
aluminium

**MARSDEN**

IP20 CNC aluminium  
Colour/s: White, Black, Brush Aluminium



700mA 2.1W 3K LED non dimmable  
Size: 56W\*60H\*43D  
Cut-out: 45\*45W



LDL1913

**MANAWATU**

IP20 CNC aluminium  
Colour/s: White, Black, Aluminium



700mA 2.5W 3K LED non dimmable  
Size: 76W\*76W\*45D.  
Cut-out: 65\*65W

LDL1927

**EGMONT**

IP20 Die cast aluminium - up or  
down

Colour/s: White, Silver



**LDL/E01**

350mA 1.2W 3K LED  
White or blue LED non dimmable  
Size: 90\*90W\*37D, Cut-out:  
75\*75W

**CLASSIFICATION:** CA-90 Abutted  
only.

**SUITABILITY:** Where glare might  
be an issue, choose an eyelid or  
indicator style.

**TONGARIRO**

IP20 Die cast aluminium  
Colour/s: White, Black, Silver

350mA 1.2W constant  
current 3K  
White or blue LED  
non dimmable  
Size: 90\*90W\*37D,  
Cut-out: 75\*75W



LDL/C01



**NEW  
PRODUCT**

# SENSOR LIGHT

## HAREWOOD

IP65 Aluminium and Plastic  
Colour/s: White, Black

240V 24W LED (2 x 12W)  
CCT Switch 3K,4K,5K  
Output: 1950-2400 lumens  
100° beam angle.

CRI: 80

Settings for sensitivity time and lux  
Integrated lamp and driver

Base: 120mm diameter,

Heads: 76mm diameter x 128mm



FL01

HL104

# WALL LIGHT

## MAYFIELD

IP65 Aluminium  
Colour/s: Black

240V 15W  
CCT Switch Selectable  
3K, 4K, 6K

Output: 1390-1650 Lumen  
CRI: 80

Fitting Size: 250mm x  
150mm  
x 63mm deep  
Built in driver.  
non dimmable.



**PONU**

IP65 Waterproof on front face  
Integrated LED lamp  
Colours: White, Black




**DL103A**

240V 8W 3K LED  
triac dimmable  
Output: 800 lumen  
Size: 80Ø\*40H  
Cutout: 68-75Ø  
Classification: IC-F

**BENMORE**

IP65 Waterproof on front face  
Integrated LED lamp  
Colours: White, Black

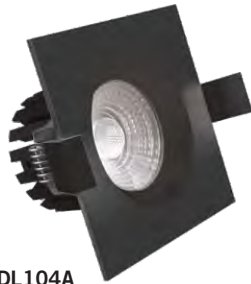

**DL104A**

240V 8W 3K LED  
triac dimmable  
Output: 700 lumen 36 degree  
Size: 80W\*80W\*40H  
Cutout: 68-75Ø  
Classification: IC-F

**PAEROA**

IP65 Aluminium - Fire rated  
Colours: White, Black, Chrome,  
Gold



**DFR1011**

240V 10W COB 3K LED  
triac dimmable  
Output: 830 lumen, 60 degree  
beam  
Size: 90Ø\*71H  
Cutout: 70Ø  
Classification: IC-F

**RAKINO**

IP44 Recessed 20 degree tilt  
Colours: Stainless 316, Raw copper

Size: 100Ø.  
Cutout: 82Ø  
Classification: CA-90



**SL3301-LED8W-KIT**  
Includes lamp & driver

**SL3301-NON-IC**  
Fitting only

**RAW COPPER - WILL  
WEATHER OVER TIME & GO  
MUCH DARKER**

**THAMES**

IP44 Recessed 20 degree tilt  
Colours: Raw copper



**SL3302-LED8W-KIT**  
Includes lamp & driver

**SL3302-NON-IC**  
Fitting only  
Size: 100\*100W.  
Cutout: 82Ø  
Classification: CA-90

**POKENO**

IP54 Recessed  
Colours: Stainless 316, Black, White

240V 5W 3K LED  
Includes driver & lamp  
Size: 100Ø\*100H  
Cutout: 82Ø  
Classification: CA-90



**PR90ST**

**TE AKAU**

IP54 Aluminium & glass  
**Colour:** Black

**DL2236**

240V 7W 3K LED non dimmable  
**Beam angle:** 60 degree  
**Size:** 90Ø\*95H



**PUKEKOHE**

IP54 Aluminium & glass  
**Colours:** White, Black

**DL37**

240V 15W 3K LED non dimmable  
**Output:** 1300 lumen, 60 degree  
**Size:** 90Ø\*100H



**CAMBRIDGE**

IP54 Aluminium & glass  
**Colours:** White, Black

**DL38**

240V 25W 3K & 4K non dimmable  
**Output:** 2000 lumen, 60 degree  
**Size:** 120Ø\*110H



**MOTU**

IP54 Aluminium & steel  
**Colour/s:** White, Black

**DL169**

240V 25W 3K, 4K LED non dimmable  
**Output:** 2400 lumens, 60 degree  
**Size:** 120Ø\*144H



**WEYMOUTH**

IP54 Aluminium  
 45 Degree tilt  
**Colour:** Black

**IK1112**

240V 6W 3K LED non dimmable  
**Size:** 90Ø\*95L




**GLENBROOK**

IP54 Aluminium  
**Colour:** Black

240V 6W 3K LED non dimmable  
**Size:** 90L\*95L

**ADJUSTABLE**

45° Tilt



**IK1111**



**MATAURI**

IP54 Aluminium & PC diffuser  
 240V 25W 3K LED  
**Colour:** Black



**UL3400**

non dimmable  
**Size:** 240\*240\*50D

**OMANA**

IP54 Indoor/ outdoor polycarb  
**Colour:** Black



**CL87-18W**

Double insulated  
 240V 18W 3K, 4K LED  
 triac dimmable  
**Output:** 1800 lumen, 120 degree  
**Size:** 275Ø\*65D

**CL87-25W**

Double insulated  
 240V 25W 3K, 4K LED  
 non dimmable  
**Output:** 2600 lumen, 120 degree  
**Size:** 350Ø\*65D

**NEWSTEAD**

IP54 Aluminium & PC  
 240V 12W 3K LED  
**Colour:** Black



**HL5602L**

**Size:** 280Ø\*95D

**AOTEA**

IP54 Indoor/ outdoor polycarb  
**Colour:** White



**C115D-18W**

Double insulated  
 240V 18W  
 3K, 4K LED  
 triac dimmable  
**Output:** 1450 lumen  
**Size:** 300Ø\*35D

**C116D-25W**

Double insulated  
 240V 25W 3K LED  
 triac dimmable  
**Output:** 1600 lumen  
**Size:** 350Ø\*35D



**SUMNER**

IP54 Aluminium - up down light  
**Colour/s:** White, Black, Graphite

**UL7710**

240V 6W 3K LED  
**Size:** 67W\*165H\*89D

**ORETI**

IP54 Aluminium - up down light  
**Colour/s:** White, Black

**UL7715**

240V 6W 3K LED  
**Output:** 370 Lumens  
**Size:** 110W\*110H\*95D

**HAURAKI**

IP54 Aluminium - up down light  
**Colour/s:** White, Black, Graphite

**UL7720**

240V 10W 3K LED  
**Size:** 140W\*140H\*110D

**DENNISTON**

IP54 Aluminium up down light  
**Colour/s:** White, Black

240V 8W  
 (2 x 4W) 3K LED  
**Size:** 85W\*65H\*70D

**UL4101****MURCHISON**

IP54 Aluminium up down light  
**Colour/s:** White, Black

**UL4102**

240V 12W (2 x 6W) 3K LED  
**Size:** 170W\*65H\*70D

**HOKITIKA**

IP54 Aluminium up down light  
**Colour/s:** White, Black

240V 12W (2 x 6W) 3K LED  
**Size:** 100W\*100H\*100D

**UL2700****MCKENZIE**

IP54 Aluminium up down light  
**Colour/s:** White, Black


**HL2621**

240V 14W (2 x 7W) 3K LED  
**Size:** 62W\*143H\*82D

**KINGSTON**

IP54 Aluminium & PC  
**Colour/s:** White, Black

240V 5W 3K LED  
**Size:** 120W\*130H\*60D

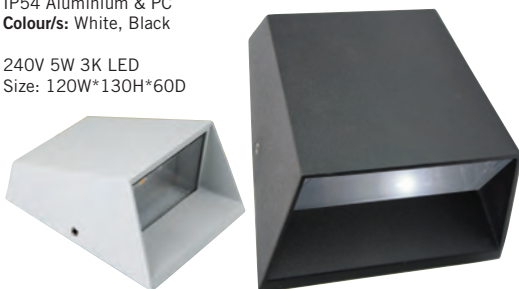**HL2691**

**ALEXANDRA**

IP54 Aluminium up down  
**Colour:** Black



**HL2221**

240V 6W 3K LED  
**Output:** 430 lumen, 40 degree  
**Size:** 80\*80W\*110H\*98D.  
**Base:** 64W\*64W

**LUMSDEN**

**HL2211**

IP54 Aluminium up down wall wash  
**Colour/s:** Black, Silver

240V 6W 3K LED  
 non dimmable

**Output:**  
 430 lumen 40 degree  
**Size:** 80Ø\*110H\*98D,  
**Base:** 83Ø



**INSTALLATION**

All outdoor wall fixtures need to be sealed from behind with silicone to prevent general deterioration & electronic failure

**COPPER CHARACTERISTICS**

As with other raw copper outdoor products copper will weather & darken over time

**STAINLESS SUITABILITY**

316 grade is suitable for all outdoor conditions except extreme seaside conditions where marine grade products may be required

**GLENORCHY**

**M6140**

IP54 General purpose in wall or soffits  
**Colour:** Raw copper

12V GU5.3 lampholder  
**Size:** 90Ø\*80D,  
**Cutout:** 60Ø  
 Holes for mounting housing  
 on dry wall or soffits

**Order lamp:** GEMR 4.5W  
**Order driver:** Q4 (for individual)




**WAIANIWA**

**VA506**

IP44 Surface mount  
**Colour/s:** Raw copper, Black  
 Stainless 316  
 240V GU10 LED.  
**Size:** 140H\*70W\*45D


**Recommended lamp:**  
 GUG-6W

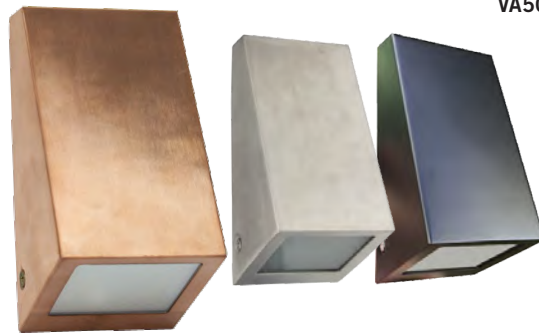

**HERIOT**

**HL2891**

IP54 Aluminium up & down light  
 - smallish size  
**Colour/s:** White, Black  
 240V 5W 3K LED.  
**Output:** 173 lumen  
**Size:** 82W\*82H\*56D

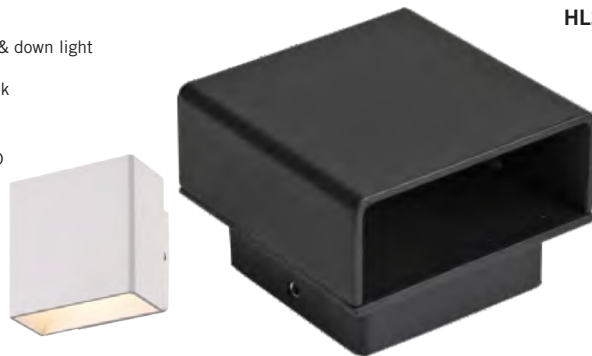



**CARDRONA**

IP54 Fixed two way light  
**Colour:** Stainless 316 grade



**HL7031**

240V 2 x GU10 LED (see note)  
**Size:** 60Ø\*165H.  
**Base:** 78Ø

**MOSSBURN**

IP54 Fixed two way light  
**Colour:** Raw copper



**HL7051**

240V GU10 LED (see note)  
**Size:** 60Ø\*165H.  
**Base:** 78Ø

**BALFOUR**

IP54 Directional spot  
**Colour:** Stainless 316 grade



**HL7033**

240V GU10 LED (see note)  
**Size:** 60Ø\*150H.  
**Base:** 78Ø

**RIVERSDALE**

IP54 Swivel & tilt  
**Colour:** Raw copper



**HL7053**

240V GU10 LED (see note)  
**Size:** 60Ø\*150H.  
**Base:** 78Ø

**DIPTON**

IP44 Fixed up or down  
**Colour:** Stainless 316 grade



**HL7032**

240V GU10 LED (see note)  
**Size:** 60Ø\*110H.  
**Base:** 78Ø

**MANDEVILLE**

IP44 Fixed one way light  
**Colour:** Raw copper



**HL7052**

240V GU10 LED (see note)  
**Size:** 60Ø\*110H\*90D.

**WAIKAKA** **HL7034**

IP54 Directional spot, adjust swivel  
**Colour:** Stainless 316 grade

240V GU10 LED  
 (see note)  
**Size:** 60Ø\*150H.  
**Base:** 110Ø

**MATAURA** **HL7054**

IP54 Swivel & tilt  
**Colour:** Stainless 316, Raw copper

240V GU10 LED  
 (see note)  
**Size:** 60Ø\*90H.  
**Base:** 110Ø

**UV stabilized plastic wedge for weatherboard walls.**

**WDG-70mm**  
**Colour/s:** White, Black  
**Fits:** HL7142, 7354, 7355

**WDG-78mm**  
**Colour/s:** Black, Brown, Grey  
**Fits:** HL7031, 7032, 7033, 7034, HL7051, 7052, 7053

Order separately  
**GU10 type lamp**  
 240V 4W 3K

**GUR4W**

- Radium brand
- High output
- Triac dimmable
- Quality German brand

**TUAPEKA**

IP54 Aluminium & glass  
One way light - up or down  
Colour/s: White, Black, Silver



**HL7070**  
240V GU10 LED  
Size: 90L\*65W.  
Base: 64W\*64W

**BALCLUTHA**

IP54 Aluminium & glass  
Fixed two way light  
Colour/s: White, Black, Silver  
240V GU10 LED  
Size: 160H\*65W\*65W.  
Base: 64\*64



**HL7071**

**CLYDEVALE**

IP54 Aluminium & glass  
Fixed two way light  
Colour/s: White, Black, Silver

**HL7355**  
240V GU10 LED  
Size: 60Ø\*160H,  
Base: 68Ø



**PUKETI**

IP54 Aluminium & glass  
One way light - up or down  
Colour/s: White, Black, Silver  
240V GU10 LED  
Size: 60Ø\*90H.  
Base: 68Ø



**HL7142**

**MANAPOURI**

IP54 Aluminium swivel & tilt  
Colour/s: White, Black

240V GU10 LED  
Size: 300L\*50W\*25D.  
Base: 300L\*50W



**HL7354-2B**

**CLYDE**

IP54 Aluminium & glass  
Swivel & tilt  
Colour/s: White, Black

240V GU10 LED  
Base: 100Ø



**HL7354-2P**

**WINTON**

IP54 Aluminium swivel & tilt  
Colour/s: White, Black



**HL7354**  
240V GU10 LED  
Size: 60Ø\*90L\*160D.  
Base: 68Ø

**GU10 LED LAMPS**

Recommended a good quality branded lamp is used. Budget lamps are likely to give very poor quality light & fail easily. For outdoor sealed lights we recommend a 4W GU10 Lamp.

**INSTALLATION**

All outdoor wall fixtures need to be sealed from behind with silicone to prevent general deterioration & electronic failure.

**ALUMINIUM SUITABILITY**

Most die-cast aluminium products are not suitable for harsh coastal conditions - consider alternatives such as plastic, brass & copper.

**COPPER CHARACTERISTICS**

As with other raw copper outdoor products copper darkens over time.

**STAINLESS SUITABILITY**

316 grade is suitable for all outdoor conditions except extreme seaside conditions where marine grade products may be required.

**FAIRLIE**

IP54 Aluminium & acrylic  
**Colour/s:** White, Black, Silver  
**HL5551**  
 240V 12W 3K LED  
**Size:** 264W\*135H\*90D



**GERALDINE**

IP54 Aluminium & acrylic  
**Colour/s:** White, Black, Silver, Cedar brown  
**HL5553L**  
 240V 12W 3K LED  
**Size:** 264W\*135H\*90D



**ARUNDEL**

IP44 Plastic body, acrylic diffuser  
**Colour/s:** White, Black, Silver  
**P60C**  
**P60C-L 6W LED**  
 240V E27 or 6W LED version  
**Size:** 275W\*150H\*100D



**MAYFIELD**

IP65 Aluminium  
**Colour:** Black  
  
 240V 15W  
 CCT Switch Selectable  
 3K, 4K, 6K  
**Output:** 1390-1650 Lumen  
**CRI:** 80  
**Fitting Size:** 250mm x 150mm  
 x 63mm deep  
 Built in driver.  
 non dimmable



**HL104**

**RUAPUNA**

IP54 Aluminium & PC diffuser  
**Colour/s:** White, Black  
**Size:** 180W\*290H\*88D

**HL5541L**  
 240V 12W 3K LED  
**HL5541**  
 240V 2\*E27



**LISMORE**

IP54 Aluminium & PC  
**Colour/s:** White, Silver  
**Size:** 180W\*290H\*88D

**HL5543L**  
 240V 12W 3K LED  
**HL5543**  
 240V 2\*E27



**GALATEA**

IP54 Aluminium & PC diffuser  
**Colour:** Black  
**Size:** 275Ø\*86D

**HL5491L**  
 240V 12W 3K LED  
**HL5491**  
 240V 2\*E27



**HUNTER**

IP54 Aluminium & PC  
**Colour:** Black  
**Size:** 280Ø\*95D

**HL5602L**  
 240V 12W LED  
**HL5602**  
 240V 2\*E27



**WOODBURY**

IP54 Aluminium & PC diffuser  
**Colour:** White, Black  
**Size:** 275Ø\*86D

**HL5492L**  
 240V 12W 3K LED  
**HL5492**  
 240V 2\*E27



**LUIGI**

IP54 UV resistant plastic & glass  
**Colour/s:** White, Black  
**Size:** 263W\*130H\*125D

**KIT1271L**  
 240V 12W 3K LED  
**KIT1271**  
 240V E27



**RONALDO**

IP54 UV resistant plastic & glass  
**Colour/s:** White, Silver  
**Size:** 263W\*130H\*125D

**KIT1273L**  
 240V 12W 3K LED  
**KIT1273**  
 240V E27



**CALUZZI**

IP54 UV resistant plastic & glass  
**Colour:** White  
**Size:** 280W\*165H\*90D

**ANIEL-L**  
 240V 6W 3K LED  
**ANIEL-E27**  
 240V E27



**LINCOLN**

IP54 Aluminium - up & down light  
Lights shines up and down  
Colour: White, Graphite

**UL6650**

240V 9W 3K LED  
non dimmable  
Output: 700 lumens  
Size: 205W\*110D\*60H



**SHEFFIELD**

IP54 Aluminium  
Lights shines up and down  
Colour: White, Graphite

**HL2721**

240V 7W 3K LED  
non dimmable  
Size: 220W\*55H\*130D




**LEESTON**

IP54 Aluminium  
Lights shines up and down  
Colour/s: Graphite, Silver

**HL2811**

240V 10W 3K LED  
non dimmable  
Size: 280W\*110H\*84D



**METHVEN**

IP54 Aluminium  
Light shines up & down  
A largish fitting also suited to commercial  
Colour/s: White, Graphite, Silver

**HL2671**

240V 12W 3K LED non dimmable  
Size: 360W\*88H\*93D




**DARFIELD**

IP54 Aluminium - up & down light  
Lights shines up and down  
Colour: Graphite

**UL6640**

240V 9W 3K LED non dimmable  
Output: 700 lumens  
Size: 205W\*110D\*60H



**OXFORD**

IP54 Aluminium  
Lights shines up and down  
Colour: White

**HL531**

240V 6W 3K LED  
non dimmable  
Size: 220W\*90H\*77D



**RANGIORA**

IP54 Aluminium  
Lights shines up and down  
Colour/s: White, Black

**HL532**

240V 12W 3K LED  
non dimmable  
Size: 300W\*120H\*97D. Base: 270W\*90H



**DUNSANDEL**

IP54 Die cast aluminium & glass  
Colour/s: Black, Silver

**HL5193L**

240V 12W 3K LED  
Size: 250W\*164H\*120D



**FLORENCE**

IP54 PC & glass diffuser  
Colour/s: White, Black, Silver

**POP**

240V E27  
Size: 200W\*130H\*100D



made in ITALY

### CHEVIOT

HL3062

IP54 Aluminium indirect light  
**Colour/s:** White, Black  
 240V 7W 3K LED  
**Output:** 200 lumen  
 Built in driver, non dimmable  
**Size** 250H&125W\*120D



### COACH

IP44 Aluminium (Coach lantern)  
**Colour:** Black  
**EL270UP**  
 240V E27  
**Size** 350H



### COLONIAL

IP44 Aluminium (Colonial lantern)  
**Colour:** Black  
**EL260UP**  
 240V E27  
**Size** 370H



### AMBERLEY

HL4511

IP54 Aluminium  
**Colour/s:** White, Black  
 240V 15W 3K LED  
**Output:** 750 lumen  
 Built in driver, non dimmable  
**Size** 250H&150W\*115D



### INSTALLATION

All outdoor wall fixtures need to be sealed from behind with silicone to prevent general deterioration & electronic failure.

### ALUMINIUM SUITABILITY

Most die-cast aluminium products are not suitable for harsh coastal conditions - consider alternatives such as plastic, brass, 316 grade stainless, or copper



**NEW  
PRODUCT**

# SENSOR LIGHT

### HAREWOOD

IP65 Aluminium and Plastic  
**Colour/s:** White, Black

240V 24W LED (2 x 12W)  
 CCT Switch 3K,4K,5K  
**Output:** 1950-2400 lumens  
 100° beam angle.  
**CRI:** 80  
 Settings for sensitivity time and lux  
 Integrated lamp and driver  
**Base:** 120mm diameter,  
**Heads:** 76mm diameter x 128mm



FL01

### TE KUITI

IP64 Slim surface step light  
Alternative to recessed  
**Colour:** Black, Graphite, White



**UL9500**  
240V 3W 3K LED  
**Size:** 100W\*100H\*30D

### TAIPA

IP64 Slim surface step light  
Alternative to recessed  
**Colour:** Black, White



**UL9400**  
240V 4W 3K LED  
**Size:** 100Ø\*30D

### AKAROA

IP64 Slim surface step light  
Alternative to recessed  
**Colour:** Black, Graphite, White



**UL9600**  
240V 8W 3K LED  
**Size:** 198W\*77H\*32D

### WAIAKE

IL3104

IP64 Recessed eyelid step-light  
**Colour:** Stainless 316, Raw copper

12V GU5.3 removable MR16 lamp  
**Order lamp:** GE-MR 4.5W  
• Constant voltage driver on request  
**Size:** 90Ø face\*115D\*60Ø body  
**Plastic sleeve:** 70Ø\*130L  
- for casting into walls



### MATATA

IL1105EYE

IP64 Recessed eyelid step-light  
**Colour:** Stainless 316, Raw copper, Black

12V 1W 3K LED  
Constant current driver on request  
- wire in series  
• Includes 2m lead  
**Size:** 55Ø\*70D.  
**Cutout:** 45Ø - for clipping into timber or dry wall



#### INSTALLATION

All outdoor wall fixtures need to be sealed from behind with silicone to prevent general deterioration & electronic failure.

#### ALUMINIUM SUITABILITY

are not suitable for harsh coastal conditions - consider alternatives such as plastic, brass & copper

#### COPPER CHARACTERISTICS

As with other raw copper outdoor products copper darkens over time

#### STAINLESS SUITABILITY

316 grade is suitable for all outdoor conditions except extreme seaside conditions where marine grade products may be required

### KUMARA

HL7472

IP55 Surface mount  
**Colour/s:** Raw copper, 316 Stainless 12V LED



1.5W LED  
**Order lamp:** DISC-1.5W  
**Order driver:** Q4-12V-6W (for individual)  
**Size:** 100Ø\*50D

### BRETT

Small wall light, or step light  
IP54 Aluminium & glass  
**Colour/s:** White, Black



**HL2471**  
240V 2W 3K LED  
**Size:** 80H\*75W\*63D

### CUVIER

Recessed light  
IP65 Cast aluminium & PC diffuser  
**Colour:** Black



**HL1123**  
240V 8.5W 3K LED  
**Output:** 900 lumen  
• Beam angle 42 degrees  
**Size:** 250W\*85H\*72D  
**Cutout for recessed box:** 240W\*77H

### PENCARROW

IP54 Slim surface mount  
Alternative to recessed  
**Colour:** Black



**HL1482**  
240V 3K LED  
**Size:** 233W\*80H\*50D

**TE PUKE**

**IL1105H-ST**  
Colour: Stainless 316



**MAKETU**

**IL1105H-CO**  
Colour: Raw copper



**GREERTON**

**IL1105H-BK**  
Colour: Black



**GLEN AFTON**


**IL1105C-ST**  
Colour: Stainless 316  
Two way directional



Two way directional

**SPOTSWOOD**

**IL1105D-ST**  
Colour: Stainless 316  
Three way directional

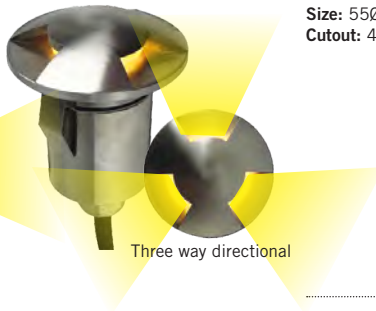

Three way directional

Deck recessed LED  
IP65 Stainless/ Copper  
Colour: Stainless 316  
350ma 1W 3K LED  
non dimmable  
Constant current driver required  
Includes 2m lead  
Size: 55Ø\*70D.  
Cutout: 40Ø

**COMPATIBILITY**

Use only driver supplied.  
Third party drivers may cause flashing and diode failure

**WIRING**

In series only - one loop per driver only  
Wiring in parallel results in instant failure of all diodes  
Wiring with more than one loop results in one loop not working.  
DO NOT attach fittings to live driver.

**DRIVERS**

See Power Supplies  
Commonly used: MINI350-4W, WP-350-12W, MINI350-12W

**MATANGI**

IP65 Medium duty inground  
Colour/s: Stainless 316, Raw copper

12V LED GU5.3 (MR16 two pin lamp)

Lamp suggested: GE-MR4.5W  
Plastic sleeve & 2m cable included

Trim size: 100Ø, depth 120mm

**NB:** Not intended for driveways or concrete areas



**HL7312**

**CAMBRIDGE**

IP67 Medium duty inground  
Colour: Stainless 316



**RAETAHI**

IP65 Medium duty inground  
12V LED GU5.3 (MR16 two pin lamp)  
Colour: Stainless 316 grade\*



**IL2405**

12V LED GU5.3 (MR16 two pin lamp)

Lamp suggested: GE-MR4.5W  
Plastic sleeve & 2m cable included

Trim size: 150Ø\*115D

Tube size: 140Ø\*170D

**NB:** Not intended for driveways or concrete areas

**IL3108-TWO**

**IL3108-FOUR**

Lamp suggested: GE-MR4.5W

Plastic sleeve & 2m cable included

Trim: 88Ø\*130D

(100mm without sleeve)

**NB:** Not intended for driveways or concrete areas

**BELMONT**

IP65 Medium duty inground  
Colour/s: Stainless 316 grade, Solid brass

12V LED GU5.3 (MR16 two pin lamp)

Lamp suggested: GE-MR4.5W  
Plastic sleeve & 1.5m cable included

Trim size: 100Ø, depth 110mm. Trim 6mm

Suitable all in-ground & in-wall applications.



**CL3B-ST**

**CL3B-BR**

**WIRING** - Joins in cable fully IP68 rated

**MULTIPLE WIRING - 12V**

Wire in parallel use only garden (stranded) cable.  
Use a magnetic transformer or suitable long distance electronic driver.  
The electrician is required to do voltage drop calculation

**POWER SUPPLIES** - Order drivers separately - See Page 67



**HUNTLY**

IP54 Double pole spot  
Including spike

**HL3104**

12V LED  
Order lamp: GE-MR4.5W  
Pole height: 800H  
Lead length: 2m  
Colour: Raw copper

**TE PUNA**

IP54 Double pole spot  
Including spike

**HL3105**

12V LED  
Order lamp: GE-MR4.5W  
Pole height: 800H  
Lead length: 2m  
Colour: Stainless 316

**TAMAHERE**

IP54 Aluminium double spot  
Including spike

**HL7354/2.800SP**

12V LED  
Order lamp: GE-MR4.5W  
Lead length: 2m  
Colour: Black



**MERCER**

IP54 Aluminium single spot  
Including spike

**HL7354.800SP**

12V LED  
Order lamp: GE-MR4.5W  
Lead length: 2m  
Colour: Black, Silver



**ARAPUNI**

IP64 Stainless spot  
Colour/s: 316 Stainless steel, Brass  
12V LED  
Order lamp: GE-MR4.5W  
Lead length: 2m

**CL3BU**

**HL7354-COWL  
HL1705-COWL  
HL7055-COWL**

- Anti glare cowl
  - Simply screws on
- Colour/s:  
Black,  
Stainless,  
Copper




lighting importers  
prolux  
lighting importers  
prolux  
lighting importers  
prolux






**ANAKIWA**

IP54  
**Colour:** Raw copper  
**HL7055-SP**  
 12V LED  
**Order lamp:** GE-MR4.5W  
**Lead length:** 2m

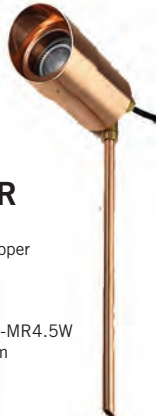

**HAMNER**

IP54  
**Colour:** Raw copper  
**HL7056-SP**  
 12V LED  
**Order lamp:** GE-MR4.5W  
**Lead length:** 2m

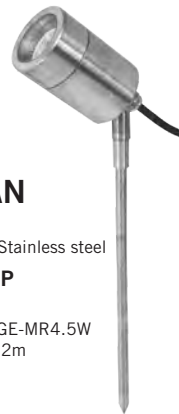


**TASMAN**

IP64  
**Colour:** 316 Stainless steel  
**HL1705-SP**  
 12V LED  
**Order lamp:** GE-MR4.5W  
**Lead length:** 2m



**MOUTERE**

IP54  
**Colour:** 316 Stainless steel  
**HL1706-SP**  
 12V LED  
**Order lamp:** GE-MR4.5W  
**Lead length:** 2m

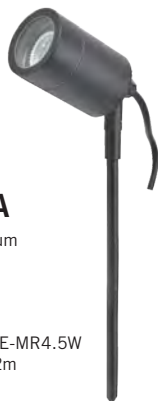

**TAKAKA**

IP54 Aluminium  
**Colour:** Black  
**HL7354SP**  
 12V LED  
**Order lamp:** GE-MR4.5W  
**Lead length:** 2m



**GRANITY**

IP54 Aluminium  
**Colour:** Black  
**HL7356SP**  
 12V LED  
**Order lamp:** GE-MR4.5W  
**Lead length:** 2m



**OTIRA**

IP64 Stainless  
**Colour:** Stainless steel  
**HL7162-SP**  
 12V LED  
**Order lamp:** GE-MR4.5W  
**Lead length:** 2m



**HOKITIKA**

IP64 Stainless spike spot  
**Colour:** 316 Stainless steel  
**CL3BU-SP**  
 12V LED  
**Order lamp:** GE-MR4.5W  
**Lead length:** 2m



**DRIVERS**

IP67 Constant Voltage drivers  
**Input:** 240V  
**Output:** 12V  
**Protection:** Open circuit, short circuit, overload, over heating  
 V6- 40W -12V Size: 176\*58\*31  
 V6-100W-12V Size: 186\*64\*39  
 V6-150W-12V Size: 191\*70\*40  
 V6-200W-12V Size: 191\*70\*40



**WIRING**

- Joins have to be fully IP rated
- Use only direct burial garden cable (stranded) of correct rating

**MULTIPLE WIRING - 12V**

- Wire in parallel using driver suitable for long distance
- Electrician is required to do voltage drop calculation

**SUGGESTED MR16 LAMP**

GE-MR4.5W for excellent light & reliability

**STAINLESS SUITABILITY**


316 grade is suitable for all outdoor conditions

**ALUMINIUM SUITABILITY**

Most die-cast aluminium products are not suitable for harsh coastal conditions, consider alternatives such as stainless, plastic, brass, copper

**COPPER CHARACTERISTICS**


As with other raw copper outdoor products the copper will darkens over time

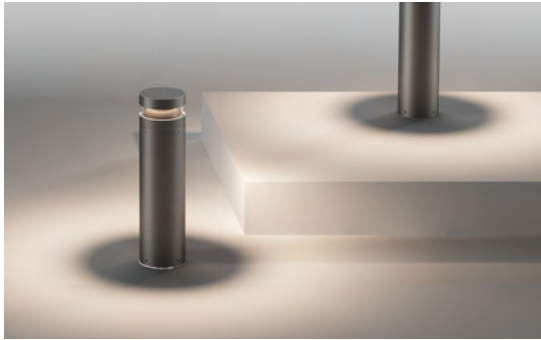

**KAIPARA**  
 IP65 Die cast aluminium & PC diffuser  
**Colour:** Black

**BL1600.600**  
**BL1600.1000**  
 360 degree beam  
 Built in driver & lamp  
 240V 24W 3K LED  
**Output:** 2100 lumen  
**Size:** 600H\*160Ø  
**Size:** 955H\*160Ø

**BL1600-SHIELD**  
 Clip in shield to create 180 degree beam  
**Colour:** Black

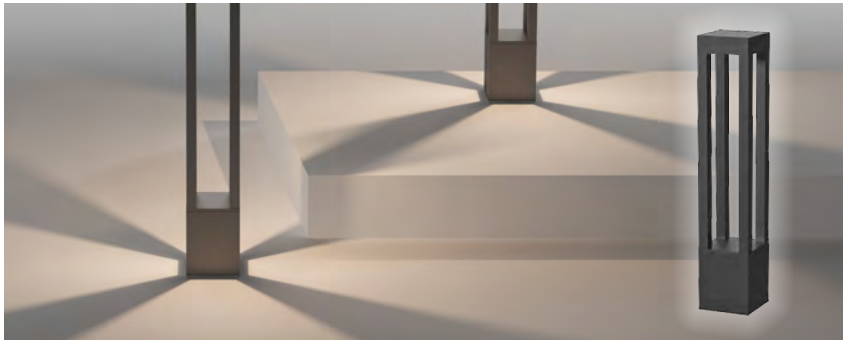**DRURY**  
 IP65 Die cast aluminium  
**Colour:** Black

**BL1700**  
 Built in driver & lamp  
 240V 22W 3K LED  
**Output:** 1900 lumen  
**Size:** 900H\*160W\*160W

**SILVERDALE**  
 IP44 Die cast aluminium  
**Size:** 650H or 900H\*90Ø  
**Base:** 143Ø  
**Colour/s:** Black, Graphite

**Option 1:**  
 240V E27 lampholder  
 Replaceable GE brand LED lamp included  
 GE-Brightstik-6W 3K or 4K

**HL7058.650-L**  
**HL7058.900-L**



**Option 2:**  
 12V G6.35 lampholder  
 Remote driver required  
 Replaceable LED lamp included - CORN-G6.35-4W

**HL7058.650-12V**  
**HL7058.900-12V**



**HOKIANGA**  
 IP64 Die-cast aluminium  
**Size:** 600H or 900H\*110Ø  
**Base:** 170Ø  
**Colour/s:** Black, Graphite

**Option 1:**  
 240V E27 lampholder  
 Replaceable GE brand LED lamp included  
 GE-Brightstik-10W 3K or 4K

**HL8403.600-L**  
**HL8403.900-L**


**Option 2:**  
 12V GU5.3 lampholder  
 Remote driver required  
 Replaceable LED lamp included  
 GE-MR6.5W (GE brand)

**HL8403.600-12V**  
**HL8403.900-12V**







**MANLY**  
 IP54 Aluminium  
**Colour/s:**  
 Black, Graphite  
**HK2836**  
 Built in driver & lamp  
 240V 9W 3K LED  
**Output:** 330 lumen  
**Beam:** 106 degree  
**Size:** 650H\*80W\*20  
**Base size:** 125W\*65

**WAIPU**  
 IP54 Aluminium  
**Colour/s:**  
 Black, Graphite  
**HK1374**  
 Built in driver & lamp  
 240V 10W 3K LED  
**Output:** 330 lumen  
**Beam:** 60 degree  
**Size:**  
 600H\*120W\*80



**SUITABILITY**

General outdoor, excluding seaside

**OPTIONS:** 12V vs 240V  
 Newer buildings have RCD systems which are very sensitive to moisture. The 12V bollards eliminate this issue, but require common wiring using a remote power supply

**INSTALLATION**

- Careful & well planned installation is essential
- Ensure all joins are fully IP68 waterproof
- Bollards should not be buried in the ground or have soil packed around the base. Resultant problems include condensation inside the bollard & paint issues.
- Ideally install on a plinth above ground
- Avoid very wet areas.

**LAMP CHOICE**

Use quality lamps to avoid regular replacement

**12V POWER SUPPLIES**

IP67 Constant Voltage drivers  
**Input:** 240V **Output:** 12V  
**Protection:** Open circuit, short circuit, overload, over heating  
 V6- 40W -12V Size: 176\*58\*31  
 V6-100W-12V Size: 186\*64\*39  
 V6-150W-12V Size: 191\*70\*40  
 V6-200W-12V Size: 191\*70\*40



### MOHAKA

DL285

IP65 Aluminium  
Colour: White

240V 25W LED 3K or 4K  
triac dimmable  
**Output:** 2150-2750 lumen 60 degree  
CRI: 80  
**Size:** 172Ø\*95H  
**Cut out:** 150-165Ø  
**Classification:** IC-F

**NEW  
PRODUCT**



### HAWEA

DL362

IP44 Aluminium  
Colour: White

240V 30W LED 3K or 4K  
Low glare design  
triac dimmable  
**Output:** 3650 lumen 36 degree  
CRI: 90 UGR<19  
**Size:** 240Ø\*142H  
**Cut out:** 195-225Ø  
**Classification:** IC-F

**NEW  
PRODUCT**



**MAHIA**

IP20 Aluminium & steel  
**Colour/s:** White, Black

**RD07B-32W**

65 degree tilt  
 240V 32W SMD 4K LED,  
 non dimmable  
**Output:** 3800 lumen 90  
 degree beam  
**Size:** 235\*145W\*118H.  
**Cutout:** 220\*130W  
**Classification:** IC-F SCB  
 50mm, HCB 50mm



**RAWENE**

IP44 Aluminium,  
 VD chrome reflector  
**Colours:** White, Black

**DL179**

240V 25W 4K LED  
 non dimmable  
**Output:** 2600 lumen  
 80 degree beam  
**Size:** 228Ø\*99H.  
**Cutout:** 205Ø  
**Classification:** IC-F SCB 50mm  
 HCB 50mm



**WAITOKI**

IP20 Aluminium, tilt 80°  
**Colour/s:** White, Black, Chrome

**DL316**

*Available in  
 3 elegant finishes*

240V 25W 4K LED  
 non dimmable  
**Output:** 1950 lumen,  
 90 degree beam  
**Size:** 175Ø\*120D.  
**Cutout:** 160Ø  
**Classification:** CA-80, SCB 50mm



**SUITABILITY** -  
 Commercial indoors

**COMPATIBILITY** - Use only drivers  
 supplied to ensure compatibility

**PHOTOMETRIC DATA** - Available  
 on request

**MOTU**

IP54 Aluminium & steel  
**Colour/s:** White, Black

**DL169**

240V 25W 3K, 4K LED  
 non dimmable  
**Output:** 2400 lumens,  
 60 degree  
**Size:** 120Ø\*144H



**RUATOKI**

IP44 Aluminium  
**Colour:** White



**DL34**

240V 25W 3K or 4K LED  
 non dimmable  
**Output:** 2100 lumen 90 degree  
**Size:** 190L\*190W\*55D.  
**Cutout:** 160L\*160W  
**Classification:** IC-F

**MOHAKA**

DL285

IP65 Aluminium  
Colour: White

240V 25W LED 3K or 4K  
triac dimmable  
**Output:** 2150-2750 lumen 60 degree  
CRI: 80  
**Size:** 172Ø\*95H  
**Cut out:** 150-165Ø  
**Classification:** IC-F



**HAWEA**

DL362

IP44 Aluminium  
Colour: White

240V 30W LED 3K or 4K  
Low glare design  
triac dimmable  
**Output:** 3650 lumen 36 degree  
CRI: 90 UGR<19  
**Size:** 240Ø\*142H  
**Cut out:** 195-225Ø  
**Classification:** IC-F



**TOKOMARU**

IP44 Aluminium  
Colour/s: White, Black



DL404

240V 25W 4K LED  
non dimmable  
**Output:** 2100 lumen 90 degree  
beam  
**Size:** 190Ø\*55D.  
**Cutout:** 165Ø  
**Classification:** IC-F SCB 50mm  
HCB 50mm

**TURANGI**

IP44 Aluminium  
Colour: White



DL416

240V 25W 3K or 4K LED  
non dimmable  
**Output:** 2300 lumen 90 degree  
beam  
**Size:** 228Ø\*55H.  
**Cutout:** 205Ø  
**Classification:** IC-F SCB  
50mm HCB 50mm

**TIRI**

IP44 Aluminium  
Colour: White



DL418

240V 35W 3K or 4K LED  
non dimmable  
**Output:** 3200 lumen 90 degree  
beam  
**Size:** 228Ø\*55H.  
**Cutout:** 205Ø  
**Classification:** IC-F SCB 50mm  
HCB 50mm

**PENCARROW**

IP20 Aluminium  
Colour: White



DL419

240V 35W 4K LED  
non dimmable  
**Output:** 3300 lumen 90 degree beam  
**Size:** 280Ø\*52D.  
**Cutout:** 230-260Ø  
**Classification:** IC-F SCB 50mm HCB  
50mm

**ARAWA**

IP20 Aluminium & steel  
Colour: White



UCL67

240V 30W 4K LED  
non dimmable  
**Output:** 2910 lumen 60 degree  
beam  
30 degree tilt  
**Size:** 175\*175W\*135H.  
**Cutout:** 160\*160W  
**Classification:** CA90 SCB 50mm  
HCB 50mm

**RAKINO**

IP40 Aluminium & plastic cover  
Colour: White



DL229

240V 25W 3K or 4K LED  
non dimmable  
**Output:** 1950 lumen 60 degree  
**Size:** 145Ø\*80H  
**Cutout:** 120Ø  
**Classification:** IC-F

**PONU**

IP20 Aluminium & plastic cover  
Colour: White



DL5022

240V 25W 4K LED  
non dimmable  
**Output:** 2200 lumen 60 degree  
beam  
**Size:** 190Ø\*80D.  
**Cutout:** 165Ø  
**Classification:** IC-F SCB 50mm  
HCB 50mm

**WAITEMATA**

IP20 Die cast aluminium  
**Colour/s:** White, Black

**SA8530**

240V 26W LED 3K or 4K  
 non dimmable  
 CRI:90  
**Output:** 3400 lumens, 40 degree  
**Reflector options:** 20, 40, 70 degree  
**Head size:** 95Ø



**CHATHAM**

IP20 Die cast aluminium  
**Colour/s:** White, Black

**HW1206B**

240V 30W LED 3K,4K or 6K  
 dimmable or non dimmable  
 CRI:90  
**Output:** 2400 lumens, 36 degree  
**Reflector options:** 24, 36, 50 degree  
**Head size:** 103Ø



**OBAN**

IP20 Die cast aluminium  
**Colour/s:** White, Black

**HW5800**

240V 35W LED 3K or 4K  
 non dimmable  
 CRI:90  
**Output:** 3600 lumens  
**Reflector:** 36 degree  
**Head size:** 100Ø\*260L



**MATANGI - Wide Angle Flood**

IP20 Aluminium  
**Colour/s:** White, Black

**HW128**

240V 30W 3K,4K or 6K  
 non dimmable  
**Output:** 2400 Lumen CRI:90  
 Beam angle 60 degree  
**Fitting size:** 115\*135mm H  
**Gearbox:** 165\*82\*45mm



**FLAGSTAFF**

IP20 Die cast aluminium  
**Colour/s:** White, Black

**HW56**

240V 30W LED 4K  
 non dimmable  
 CRI:90  
**Output:** 3000 lumens,  
 36 degree  
 Zoom adjustment 15-60 degrees  
**Head size:** 100Ø



**KAPITI**

**Colour:** White  
**HW1331**

240V 25W LED 4K  
 CRI:90  
 dimmable or non dimmable  
**Output:** 2100 lumens, 36 degree  
**Reflector options:** 24, 36, 50 degree  
**Head size:** 90Ø



**KARORI**

IP20 Die cast aluminium  
**Colour/s:** White, Black

**HW1440**

240V 30W LED 3K,4K or 6K  
 dimmable or non dimmable  
 CRI:90  
**Output:** 2400 lumens, 36 degree  
**Reflector options:** 24, 36, 50 degree  
**Head size:** 90Ø



**PAKIRI**

IP20 Die cast aluminium  
**Colour/s:** White, Silver

**HW1205E**


240V 30W LED 3K or 4K  
 non dimmable  
 CRI:90  
**Output:** 2400 lumens, 36 degree  
**Reflector options:** 16, 24, 36, 50 degree  
**Head size:** 103Ø



**RUSSELL** **AM02-36W**

IP20 Aluminium  
240V 36W 4000K LED  
**Colour/s:** White, Black

**Output:** 4680 lumen.  
**Beam:** 90 degrees  
Adjustable 60 degree tilt  
**Size:** 370\*60\*108



**TAIRUA** **AM02-54W**

IP20 Aluminium  
240V 54W 4000K LED  
**Colour/s:** White, Black

**Output:** 7020 lumen.  
**Beam:** 90 degrees  
Adjustable 60 degree tilt  
**Size:** 510\*60\*108



**OPUA**

**AM03-60W**

240V 60W 4K LED  
**Colour/s:** White, Black  
**Output:** 8400 lumen  
**Size:** 1150\*60\*98

**AM03-40W**

IP20 Aluminium  
**Colour/s:** White, Black  
240V 40W 4K LED  
**Output:** 5600 lumen  
**Beam angle:** 90 degrees  
**Size:** 1150\*60\*98



**WAITANGI** **AM04-60W**

IP20 Aluminium  
240V 60W 4K LED  
**Colour/s:** White, Black

**Output:** 7200 lumen  
**Beam:** 120 degrees  
**Size:** 1150\*80\*98



**AM03-30-60W**

 IP20 Aluminium, Plastic diffuser  
240V output wattage selectable by dipswitch 30W/40W/50W/60W  
CCT switch selectable 3K or 4K


**Output:** 8400 lumen  
**Beam angle:** 90 degrees  
**Size:** 1150\*60\*108 H

**APPLICATION**  
Retail, Supermarkets, Offices, Art gallery

**FEATURES**

- Makes for an eye catching installation
- Flexible & adaptable using standard commercial track
- Easily maintained or upgraded (clip in)
- Spots can be added to the track
- Quality product with branded components

**QUALITY**

 Osram German brand driver for top quality & performance

**TRACK APPLICATION**

- Fitted with HW-4 commercial 3 Circuit track adaptor
- Track can be suspension hung, or fixed to ceiling

**AVAILABILITY**  
Stock item



**PORONUI** NS208-25W  
 IP20 Cast aluminium  
**Colour/s:** White, Black  
 240V 25W 3K or 4K LED  
 triac dimmable  
**Output:** 2600 lumen  
**Beam angle:** 36 degrees  
**Head size:** 85Ø\*211L  
 Surface mount, swivel & tilt  
 Folded into verticle position

**MOSGIEL** NS207-15W  
 IP20 Cast aluminium  
**Colour/s:** White, Black  
 240V 15W 3K or 4K LED  
 triac dimmable  
**Output:** 1550 lumen  
**Beam angle:** 36 degrees  
**Head size:** 85Ø\*186L  
 Surface mount, swivel & tilt

**TRACK**  
 Surface mount or suspended commercial track  
**Colour/s:** White, Black  
 240V 16 Amp, 3 circuit - three live conductors  
**Length options:** 2m, 3m. Cut to any length  
 End feed & end cap priced separately  
**Size:** 30W\*35H  
**Polarity**  
 Before ordering consider the polarity of the track layout so as to order the correct joiner components

**TRACK COMPONENTS**

<b>HW4- ECAP</b> End cap	<b>HW4- JO1</b> Joiner	<b>HW4- LO1</b> Live feed	<b>HT4-LO1-1</b> <b>HT4-LO1</b>	<b>HW4- LO2</b> Feed joiner	
<b>HW4-JO2</b> L joiner	<b>HT4-JO2-1</b> <b>HT4-JO2</b>	<b>HW4- JO3</b> T joiner	<b>HT4-JO3-1</b> <b>HT4-JO3</b>	<b>HW4- JO4</b> Cross joiner	
				<b>HW1205E-R</b> Rod spot 500mm White	
<b>HW4- JO5</b> Flexible bend	<b>HW4- JO6</b> Rod suspension	<b>HW4- JO9</b> Suspension kit	<b>HW-BP</b> Clip in base plate for track spots Size: 100Ø White, Black		



### ARAPUNI

IP20 Aluminium & steel  
Colour: Black

#### HBW-NB

240V 50W 3K or 4K LED  
non dimmable  
**Output:** 5500 lumen, medium 45 degree beam  
DIP switch on driver to reduce output  
**Quality:** Meanwell driver  
**Size:** 310Ø. Dropper: 2m



### PIO PIO

IP20 Die cast aluminium  
Colour: Black

#### HBW-WB

240V 50W 3K or 4K LED  
non dimmable  
**Output:** 5500 lumen, wide 120 degree beam  
DIP switch on driver to reduce output  
**Quality:** Meanwell driver  
**Size:** 410Ø. Dropper: 2m



### OHAUPO

IP20 Aluminium & PC  
Colour: Black

#### HBW-PD

240V 50W 3K or 4K LED  
non dimmable  
**Output:** 5500 lumen  
DIP switch on driver to reduce wattage  
**Quality:** Meanwell driver  
**Size:** 330Ø. Dropper: 2m



### RUAKURA

IP20 Aluminium & prismatic diffuser

#### PR19

Lampholder 240V E27 porcelain  
**Size:** 420Ø\*500H.  
**Base:** 120Ø  
**Overall drop:** 2.0m



### TAIERI

IP20 Aluminium & steel  
Colour: Black

#### GKL-100W

240V 100W 4K LED  
non dimmable  
**Output:** 12000 lumen , 90 degree beam  
DIP switch on driver to reduce output  
**Quality:** Meanwell driver  
**Size:** 350Ø. Dropper: 2m chain



**PUPUKE**

PL5012

IP20 Aluminium  
Colour: White Trim

240V 35W 4K LED  
triac dimmable  
**Output:** 2750 lumen,  
120 degree beam  
**Size:** 500Ø.  
**Overall drop:** 1.2m  
**Quality:** Philips driver

**EGMONT**IP20 Die cast aluminium  
Large quality fitting for hotels,  
offices etc  
Colour: Black**P105**

240V 60W 4K LED  
non dimmable  
**Size:** 900Ø diameter  
**Dropper & fixing:** as per  
requirements



**QUALITY**  
Osram driver



# TRI•PROOF

## Ceiling *or* Suspended

DB18

IP65 "Triproof" aluminium &  
PMMA**DB18**

240V 50W 4K LED  
**Output:** 5900 lumens  
**Beam angle:** 130 degrees  
**Size:** 1600L\*78W\*54H  
Suspension kits included &  
ceiling fixing clips included

**FEATURES**

- Easy installation
- Cost effective commercial lighting system
- High impact diffuser
- Waterproof, dust proof, pressure proof

## LAMPTON

PL720

240V 80W 9000 lumens 4K LED  
DIP switch on driver to change  
output

**For example:**  
40W 5700 lumens  
60W 7400 lumens  
**Colour:** Black

### PL720

**IP65** powdercoated aluminium  
pole, & die cast aluminium lantern  
**Lantern head size:** 660H\*350W  
**Overall height:** 3200H  
**Pole size:** 2500H\*76Ø  
**Base plate size:** 190\*190mm



### AVAILABILITY

Lanterns & poles ex stock

### SUITABILITY

Subdivisions, retirement villages,  
retail complexes etc

### LANTERN QUALITY

Premium product with 5 year  
guarantee



Meanwell driver & Nichia  
chips

### POLE QUALITY

Locally manufactured 10 year  
guarantee

### PHOTOMETRICS

Available on request

### DELIVERY/ TRANSPORT

By negotiation

### INSTALLATION

Connection is made in the lantern  
head where the driver is located

Lantern slides on and is secured  
with 4 allen screws

- No access hatch on the pole
- Base plate bolted to concrete  
pad

- Use at least M16 150mm long  
Dyna bolts with 30mm wide  
washers



Modern efficient & effective commercial lighting

- Low installation costs
- Adjustable output range

Colour temperature: 4K

**Output:** four options adjustable with DIP switch on driver  
 240V 36W 5000 lumen  
 240V 44W 6110 lumen  
 240V 52W 7220 lumen  
 240V 60W 8340 lumen

**Beam:** Optic lens light distribution  
 90 degree Wide

**Size:** 1437L\*70H\*65W

**Colour:** Black

**SL60LT**

Linkable trunking option for continuous runs  
 Three phase internal wiring for independent switching  
 Order end caps, power feed, flex tube, & suspensions separately  
 Order one power feed plug per run

**SL60ST**

Single stand alone unit  
 Supplied complete with power cable & end caps  
 Order suspension kits & flexible tube separately



TRUNKING SYSTEM

65

**AVAILABILITY**

All ex stock

**COMPONENTS**

See online: Joiners, suspensions, photos, instruction etc



**QUALITY**

Osram German brand driver for top quality & performance

**PHOTOMETRICS**

IES data available on request

# LAMPS

**12V MR16**  
 non dimmable  
**GE-MR-4.5W 3K**  
**GE-MR-6.1W 3K, 4K**  
 GE = GE brand



**240V GU10**  
 non dimmable  
**GUR-4W 3K, 4K**  
 Dimmable  
**GUG-6W 3K, 4K**



**GE-BRIGHTSTIK-6W**  
 240V 6W 3K or 4K

**GE-BRIGHTSTIK-10W**  
 240V 10W 3K or 4K

General purpose LED - GE brand  
 E27 non dimmable  
**Output:** 810 lumen  
**Beam:** 240 degrees  
**Life:** 15000 hours  
**Size:** 37Ø\*115L incl thread



**G4**  
 12V G4 non dimmable  
 G4-1W 3K  
 Size 9Ø\*25L excl pins  
 Use specified CV driver



**G9**  
 240V G9 non dimmable  
 G9-2.5W 3K  
 Size 18Ø\*38L excl pins  
 No driver required



**G9**  
 240V G9 non dimmable  
 G9-4W 3K  
 Size 24Ø\*55L excl pins  
 No driver required







**DISC R** (Rear pin option)  
 12V G4 non dimmable  
 DISC 1.5W, 3K, 4K  
 Size 30Ø  
 Use specified driver  
 Voltage 10V-35V  
 - suitable modern boat

**DISC**  
 12V G4 non dimmable  
 DISC-1.5W 3K, 4K  
 Size 30Ø  
 Use specified driver  
 Voltage 10V-35V  
 - suitable modern boat

**CORN-G4**  
 12V G4 non dimmable  
 CORN-3.5W 3K  
 Size 16Ø\*32L excl pins  
 CORN-2W 3K, 4K  
 Size 12Ø\*32L excl pins  
 Use specified CV driver

**CORN-G6.35**  
 12V G6.35 non dimmable  
 G6.35-4W 3K  
 Size 18Ø\*35L excl pins  
 Use specified CV driver



# DRIVERS

## CONSTANT CURRENT

**MINI-350mA-4W**  
 IP65 Constant current non dimmable  
**Input:** 100-240V  
**Max output:** 1-4W  
**Output current:** 350ma  
**Output voltage:** 2-12V  
**Size:** 38L\*27W\*21H



**LMVC8AI-UNI**  
 Constant current non dimmable  
**Input:** 100V-240V  
**Max output:** 1-9W  
**Output current:** 350ma  
**Output voltage:** 3-26VDC  
**Size:** 85L\*40W\*23H



**MINI-350mA-12W**  
 IP65 Constant current non dimmable  
**Input:** 100-240V  
**Max output:** 4-12W  
**Output current:** 350ma  
**Output voltage:** 12-35V  
**Size:** 50L\*48W\*24H




**LSC20W350P-UNI**

HEP IP20  
 Constant current non dimmable  
**Input:** 100-277V  
**Max output:** 11-19.3W  
**Output current:** 350ma  
**Output voltage:** 32-55Vdc  
**Size:** 42W\*52W\*15H



**DIM500mA/12W**  
 Constant current dimmable with trailing edge dimmer  
**Input:** 220-240V  
**Max output:** 12W  
**Output current:** 500ma  
**Output voltage:** 12-24V  
**Size:** 100L\*40W\*23H



**Q4-12W-CC**  
 Constant current dimmable  
**Input:** 200V-240V  
**Max output:** 6-12W  
**Output current:** 330mA  
**Output voltage:** 20-40VDC  
**Size:** 125L\*45W\*30H



**LLVC12A-UNI**  
 Constant current non dimmable  
**Input:** 100V-240V  
**Max output:** 6-12W  
**Output current:** 350mA  
**Output voltage:** 18-36VDC  
**Size:** 170L\*40W\*30H



**WP-350mA-12W**  
 IP68 Constant current non dimmable  
**Input:** 220-240V  
**Max output:** 1-12W  
**Output current:** 350ma  
**Output voltage:** 2-35V  
**Size:** 188L\*76W\*38H



**Q4-350mA-20W**  
 Constant current non dimmable  
**Input:** 240V  
**Max output:** 1-20W  
**Output current:** 350ma  
**Output voltage:** 2-58V  
**Size:** 113L\*44W\*28H



**Q8H-500mA-40W**  
 Constant current non dimmable  
**Input:** 240V  
**Max output:** 13-40W  
**Output current:** 500ma  
**Output voltage:** 27-80V  
**Size:** 142L\*50W\*25H



# DRIVERS

## CONSTANT VOLTAGE

IP65 Constant voltage non dimmable  
**MINI-12V-4W**  
**Input:** 100-240V  
**Output:** 12V min 1W max 4W  
**Size:** 38L\*27W\*21H



**MINI-12V-12W**  
**Input:** 220-240V  
**Output:** 12V min 1W max 12W  
**Size:** 50L\*48W\*24H

Constant voltage non dimmable  
**Q4-12V-6W**  
**Input:** 240V,  
**Output:** 12V 6W  
**Size:** 81L\*39W\*22D



**Q4-12V-12W**  
**Input:** 240V,  
**Output:** 12V 12W  
**Size:** 98L\*39W\*22D

**Q4-12V-20W**  
**Input:** 240V,  
**Output:** 12V 20W  
**Size:** 113L\*44W\*28

Constant voltage non dimmable  
**Q8H-12V-40W**  
**Input:** 240V,  
**Output:** 12V 40W  
**Size:** 166L\*52W\*24D



**Q8H-12V-50W**  
**Input:** 240V, **Output:** 12V 50W  
**Size:** 184L\*61W\*32D

**DIM12-50**  
 Constant voltage Dimmable  
**Input:** 240V  
**Output:** 12V 50W maximum  
**Size:** 184\*61\*32



IP67 Constant voltage non dimmable  
**Input:** 100-240V  
**V6-40W-12V**  
**Size:** 176\*58\*31  
**V6-100W-12V**  
**Size:** 186\*64\*39  
**V6-150W-12V**  
**Size:** 191\*70\*40  
**V6-200-12V**  
**Size:** 191\*70\*40



**V2-200-24T**  
**Size:** 249\*72\*40  
 Dimmable

**DIM24-50**  
 Constant voltage dimmable  
**Input:** 240V  
**Output:** 24V 50W maximum  
**Size:** 184\*61\*32



Constant voltage non dimmable  
**Q3-24V-36W**  
**Input:** 240V,  
**Output:** 24V 36W  
**Size:** 140L\*50W\*35D



**Q3-24V-50W**  
**Input:** 240V,  
**Output:** 24V 50W  
**Size:** 182L\*60W\*32D

**Q3-24V-75W**  
**Input:** 240V,  
**Output:** 24V 75W  
**Size:** 182L\*60W\*32D



**PROLUX LIGHTING**  
**3 YEAR Warranty**

**WARRANTY  
POLICY**

*Thank you for choosing Prolux Lighting for your lighting needs.  
We are committed to providing high-quality and reliable lighting solutions, and  
we back our products with a 3-year warranty to ensure your satisfaction.*

**TERMS**

**WARRANTY PERIOD:** Prolux Lighting warrants its products to be free from defects in material and workmanship for a period of 3 years from the date of purchase.

**WARRANTY COVERAGE:** During the warranty period, Prolux Lighting will, at its discretion, repair or replace any product found to be defective due to faulty materials or workmanship. This warranty is applicable only to products purchased from authorized Prolux Lighting distributors and used under normal conditions.

**EXCLUSIONS:** This warranty does not cover any damage caused by misuse, abuse, neglect, accidents, improper installation or handling, or natural disasters. The warranty is also void if the product has been modified or repaired by anyone other than Prolux Lighting or an authorized representative.

**CLAIMS:** To make a warranty claim, you must contact Prolux Lighting customer service within the warranty period. You will need to provide a copy of the original purchase receipt, a description of the defect, and any other relevant information to support your claim. Prolux Lighting will provide instructions for returning the product for evaluation and will issue a repair, replacement, or refund at our discretion.

**LIMITATION OF LIABILITY:** Prolux Lighting's liability under this warranty is limited to the cost of repairing or replacing the defective product. Prolux Lighting is not liable for any incidental or consequential damages, including but not limited to lost profits, loss of business, or other economic damages.

**GOVERNING LAW:** This warranty is governed by the laws of New Zealand. Any disputes arising out of or in connection with this warranty shall be resolved by the courts of New Zealand.